

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
A-6621

Total Pages in this Submission
58

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

A COOLER FOR ELECTRICAL COMPONENTS

and invented by:

Jurgen Schulz-Harder

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 13 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
A-6621

Total Pages in this Submission
58

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal b. ☐ Informal Number of Sheets 14
4. ☒ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & documents)
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)
10. ☒ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail (Specify Label No.): _____

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
A-6621

Total Pages in this Submission
58

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. ☒ Additional Enclosures (please identify below):

"Substitute Specification" with the Preliminary Amendment (from which pages and claim fees are calculated) and a Marked-Up copy of Specification (English translation)

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	31	- 20 =	11	x \$9.00	\$99.00
Indep. Claims	1	- 3 =	0	x \$39.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$380.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$479.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. 08-2455 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☐ Credit any overpayment.
- ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated:

4/20/99

020741



cc: 20741

020741

Signature

Stewart L. Gitler - Reg. 31,256
Hoffman, Wasson & Gitler, P.C.
2361 Jefferson Davis Highway - Suite 522
Arlington, VA 22202
(703)415-0100

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9(f) AND 1.27 (b)) - INDEPENDENT INVENTOR**

Docket No.
A-6621

Serial No.

Filing Date

Patent No.

Issue Date

Applicant/ **Jurgen Schulz-Harder**
Patentee:

Invention: **COOLER, IN PARTICULAR FOR ELECTRIC COMPONENTS**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled above and described in:

- ☒ the specification to be filed herewith.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern or organization exists.
☐ Each such person, concern or organization is listed below.

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27)

FULL NAME

ADDRESS

☐ Individual☐ Small Business Concern☐ Nonprofit Organization

FULL NAME

ADDRESS

☐ Individual☐ Small Business Concern☐ Nonprofit Organization

FULL NAME

ADDRESS

☐ Individual☐ Small Business Concern☐ Nonprofit Organization

FULL NAME

ADDRESS

☐ Individual☐ Small Business Concern☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF INVENTOR Jurgen Schulz-Harder

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____ DATE: _____

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the application of:

Jürgen Schulz-Harder

Serial No : **Not yet awarded** Group Art Unit:
Filed : Examiner:
For : **A COOLER FOR ELECTRICAL
COMPONENTS**

PRELIMINARY AMENDMENT

Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Please amend the above-identified application as follows:

In the Specification:

Please delete the current Specification and insert the enclosed "Substitute Specification".

In the Claims:

Please delete claims 1-30 and insert the following new claims:

--31. A cooler, in the form of a heat pipe, having a housing in which an interior space closed to the outside is formed to hold a liquid, vaporizable coolant or heat-transport medium, with at least one first cooling or vaporization area formed in the housing interior for accommodating a heat output and a second condensation area which is formed in the housing and is spatially distant for dissipating heat, the housing comprising: a plurality of plates which are superficially joined to one another and which are provided with a plurality of openings for forming channels which are interconnected and which join the first area and the second area; and at least two metal

layers which follow one another in a stack and are structured to form at least one capillary area which extends between the first cooling or vaporization area and the second condensation area , and that at least one other metal layer is structured to form a vapor channel structure with are least one vapor channel, such that the at least one vapor channel extends between the first area and second area and has a flow cross section which is larger than a flow cross section of the at least one capillary area.

32. The cooler as claimed in claim 31, wherein there is at least one capillary area on either side of the vapor channel structure.

33. The cooler as claimed in claim 31, further comprising flat top and bottom surface.

34. The cooler as claimed in claim 31, wherein the cooler is formed as a rectangular plate, and the first area and the second area are separated on either side of the cooler by an imaginary center plane (M) which runs perpendicular to a lengthwise extension (L) of the cooler.

35. The cooler as claimed in claim 31, wherein the first area has on at least one surface side of the cooler, at least one electrical component or at least one surface for attaching the at least one electrical component.

36. The cooler as claimed in claim 31, further comprising an auxiliary cooling means on at least the second area.

37. The cooler as claimed in claim 36, wherein the auxiliary cooling means is a cooling element which dissipates heat to ambient air or an ambient medium.

38. The cooler as claimed in claim 36, wherein the auxiliary cooling means is one through which an external coolant flows.

39. The cooler as claimed in claim 31, wherein the plurality of plates are structured such that in an area of these plates a widely branched channel system results, the channel system having continuous, post-like areas between a closed top and bottom.

40. The cooler as claimed in claim 31, wherein the plurality of plates are metal layers which form the capillary structure and metal layers which form the vapor channel structure, are each provided with a plurality of openings and wherein the ratio of a closed area to an open area formed by the openings for the metal layers which form the vapor structure is greater than for the metal layers which form the capillary structure.

41. The cooler as claimed in claim 40, wherein the metal layers which form the capillary structure and the metal layers which form the vapor channel structure are structured similarly, the plurality of openings in the metal layers which form the vapor channel structure having a larger cross section than corresponding plurality of openings in the metal layers which form the capillary structure.

42. The cooler as claimed in claim 40, wherein the metal layers which form the vapor channel structure have more openings than the metal layers which form the capillary structure.

43. The cooler as claimed in claim 31, wherein the plurality of openings in one of the at least two metal layers and the plurality of openings in an adjacent metal layer in the

capillary structure in the vapor channel structure in planes of these layers perpendicular hereto form continually changing flow paths between the first and the second area.

44. The cooler as claimed in claim 31, wherein the plurality of openings of at least one metal layer is surrounded by material crosspieces which are joined to one another or which branch in the manner of a network and which form a ring structure around each opening.

45. The cooler as claimed in claim 44, wherein the material crosspieces form a hexagonal ring structure around each opening.

46. The cooler as claimed in claim 44, wherein the ring structure has at least three corner points which form a triangle.

47. The cooler as claimed in claim 31, wherein the first and second areas form continuous post-like or column-like areas.

48. The Cooler as claimed in claim 46, wherein the continuous post-like or column-like areas are formed by the corner points of the ring structure.

49. The cooler as claimed in claim 31, wherein the at least two metal layers are made identical in at least one capillary structure, but adjacent layers are turned one to another.

50. The cooler as claimed in claim 1, wherein a structured area of the at least one metal layer has angular openings or breaches.

51. The cooler as claimed in claim 31, wherein the other metal layers for at least one vapor channels structure has additional openings or breaches.

52. The cooler as claimed in claim 31, wherein the at least one metal layer which forms the capillary structure in a structured area is provided with a plurality of slotted openings.

53. The cooler as claimed in claim 52, wherein to form the capillary structure, metal layers of a first type in which the slots extend in a first axial direction, and metal layers of a second type are used in which the slots extend in a second axial direction which includes an angle with the first axial direction.

54. The cooler as claimed in claim 53, wherein the angle is 90°.

55. The cooler as claimed in claim 31, wherein the at least the metal layers for the capillary structure on at least one surface side are provided with a plurality of groove-like depressions.

56. The cooler as claimed in claim 31, wherein the at least one capillary structure is formed by at least one channel in which there is a material which supports and/or produces a capillary action.

57. The cooler as claimed in claim 56, wherein the material which supports and/or produces a capillary action is a powder selected from metal oxide, aluminum, copper oxide, aluminum oxide, ceramic or combinations thereof.

58. The cooler as claimed in claim 31, wherein the at least two metal layers are partially made from metal.

59. The cooler as claimed in claim 31, wherein the thickness of the at least two metal layers is approximately 100 - 1000 microns.


60. The cooler as claimed in claim 31, wherein structure widths are in the range between 50 - 1000 microns.

61. The cooler as claimed in claim 31, wherein the at least one capillary structure is formed by at least two metal layers and the at least one vapor channel structure is formed by at least one metal layer.--

REMARKS

Applicant has provided a Substitute Specification, marked-up copy of the original specification, and replacement claims. No new matter has been added to the application.

Respectfully submitted,

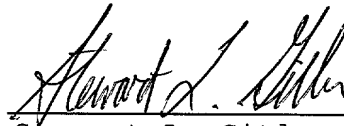

Stewart L. Gitler
Reg. No. 31,256

April 14, 1999
(703)415-0100

Attorney Docket No: **A-6621.PAM/cat**

A Cooler, ~~especially~~ for electrical components



Background of the Invention

The invention relates to a cooler, ^{in particular, a cooler} ~~especially~~ for electrical components, in the form of a ~~so-called~~ heat pipe.

Coolers of this type are fundamentally known and are based on the principle of vaporization and condensation of a coolant, or heat transport medium, housed in the closed interior of the cooler. Generally these coolers have a round structure (US 35 37 514). Lengthwise grooves are used as the capillary structure. These round coolers must be connected to a flat carrier on which ~~then~~ the components to be cooled are located. These carriers yield additional heat transfer or thermal resistance.

Furthermore, ^{it is also known to have} a flat design ~~is also known~~ for this cooler (US 56 42 775). These known coolers consist of a block in which tubular channels are formed. Production is complex and expensive.

Furthermore, ^{it is also known to have} a cuboidal cooler ~~is known~~ (US 49 57 803); its housing consists of a plurality of metal layers stacked on top of one another and connected superficially to one another, which are structured and arranged such that within the body, slots yield crossing channels which are joined to one another at the crossing points. This ~~known~~ design is only suited as a thermal spreader. There are no differing vapor channel and capillary structures. In addition, heat transport over long distances is necessary.

Figures 6 and 7 each show in a simplified view, and in an overhead view, two individual, or metal layers, for example of copper for the capillary area (Figure 6) and the vapor channel area (Figure 7);

Figure 8 shows, in a partial schematic, a section through the capillary area, or through the vapor area, of Figures 6 and 7;

Figures 9 and 10 show, in an overhead view, structured metal layers for the capillary area, or the capillary structure, (Figure 9) or for the vapor channel area or the vapor channel structure (Figure 10) in another possible embodiment of the invention;

Figures 11 and 12 each show, in a partial representation, the two stacked metal layers of Figure 9 for the capillary area;

Figure 13, in a partial representation, shows an overhead view of a partial structure of the capillary area formed by two successive metal layers of Figures 11 and 12;

Figures 14, 15 and 16 show representations similar to Figures 11, 12 and 13 for the vapor channel area;

Figures 17 and 18 show, in an enlarged partial representation, and in an overhead view, similar to Figures 11 and 12, individual metal layers for the capillary area of another possible embodiment;

Figure 19 shows, in a partial representation, an overhead view of a partial structure of the capillary area formed by two successive metal layers of Figures 17 and 18;

Figures 20, 21 and 22 show representations similar to Figures 17, 18 and 19, but for the vapor channel area;

Figure 22 shows the two layers of Figures 20 and 21 on top of one another for forming the vapor channel area;

Figure 23 shows, in the representation of Figure 1, another possible embodiment of the invention;

Figure 24 shows, a section along line II-II of Figure 23, for the sake of simplicity, only, the capillary area, or the capillary structure being shown;

Figure 25 shows a section along line III-III or IV - IV of Figure 23, for the sake of simplicity, only, the capillary area or the capillary structure being shown;

Figure 26 shows, in a simplified representation, and in an overhead view, one metal layer for the capillary area;

Figures 27 and 28 each show, in a simplified representation, and in an overhead view, two additional embodiments of one metal layer for the vapor channel area; and

Figure 29 shows, a representation similar to Figure 24, ~~for~~ another possible embodiment.

DETAILED DESCRIPTION OF THE INVENTION

In Figures 1 - 22, a heat sink or cooler for dissipating the heat of a heat source is labeled 1. The cooler 1 is built as a so-called heat pipe, but in contrast to the known heat pipe arrangements, the cooler 1 has a very flat plate-shape with flat surfaces on the top and bottom. In the embodiment shown in Figure 1, the cooler 1 is ^{shown} produced in an overhead view with a rectangular peripheral line, or with the shape of a very flat cuboid, which is rectangular in an overhead view.

Generally the cooling or vaporizer area (first area) is labeled 2, and the second area for heat dissipation, or the condenser area, is labelled 3. The two areas are offset against one another in the lengthwise direction L, of the plate-shaped cooler 1, and on either side of a center plane M, which intersects the cooler 1, and its lengthwise sides vertically. The heat

dissipated on the area 2, to the cooler 1, is labelled with an arrow P1, and the heat dissipated by the cooler, on area 3, ^{is labelled} by an arrow P2. The heat source is ~~for example~~ formed by the semiconductor power components which are provided on the closed flat top and/or bottom of the cooler 1, on area 2, the flat top and/or bottom being formed by one metal layer 7 (metal foil or plate).

In Figure 2, these semiconductor power components, or chips, which produce heat loss, are labelled 4-6. For electrical insulation on the top and/or bottom of the cooler 1, there is ^{provided} at least in the area of chips 4-6, one ceramic layer 7', which is connected in a suitable manner to the closed metal layer 7, which forms the top and bottom of the cooler.

The inner structure of the cooler 1, and how it works, in general, follow from Figure 2. The inner structure consists of three areas which each extend over the entire cooler, and which are stacked on top of one another, between the top and bottom metal layer 7, ^{more} specifically ^{it consists} of the two outer capillary structures or areas 8, and ^a the middle vapor channel, or vapor channel area, or vapor channel structure 9. The capillary areas 8 are formed by a host of channels which extend between the two areas 2 and 3 and are connected, ⁱⁿ at least in these areas to the vapor channel or the vapor channel area 9. The ^{vapor channel} latter is ~~for example~~ a continuous channel which extends over the entire length and width of the cooler 1, or is formed, in the manner detailed below, by a structure of several individual channels, the entire cross section of the

vapor channel ~~however~~ being much larger compared to the overall cross section of the capillary areas 8.

The interior of the cooler 1 is partially filled with a coolant which vaporizes when heated. In the simplest case water, also in mixture with an additive, for example, methanol, is suited as the coolant.

How the cooler 1 works is based on the fact that the heat which has flowed onto the area 2 vaporizes the coolant there within the cooler and the vapor then flows in the vapor channel 9 from the area 2 in the direction to the area 3, i.e. in the direction of the arrow A of Figure 2. On the area 3, the heat is dissipated to the outside according to arrow P2. This leads to condensation of the coolant, which as condensate travels into the capillary areas 8, and from there under capillary action flows back opposite the arrow A of Figure 2 on the area 2, where then again vaporization of the medium takes place by the absorbed heat P1, etc. The cooler 1, therefore with reference to the vaporizable coolant provided in the interior of this cooler, forms a closed system, as is inherently known of heat pipe systems.

Figure 3 shows again in a simplified representation, the cooler 1, ^{and} on the area 3, cooling elements, or cooling sheets 10, being provided on the outside, which with a large surface cause dissipation of the heat to the outside according to arrow P2, and through or around, ^{by} ~~which for example~~ an air stream generated by a fan flows.

Figure 4 shows in a similar representation to Figure 3, an auxiliary cooler 11 which is located on the area 3 and through

which a coolant or heat-transporting medium of an external cooling system flows, for example, cooling water of an external cooling circuit. This auxiliary cooler 11 can be formed ~~for~~ ~~example~~ directly on the area 3 of the cooler 1 by several metal layers which are stacked on top of one another and which are joined superficially to one another and in the housing of the auxiliary cooler 11 form internal, closed cooling channels through which the external coolant flows. In particular, it is possible to form the auxiliary cooler 11 as a so-called microcooler, as is described for example in DE 197 10 783.

As is indicated in Figure 5 with 12 and 13, the cooler 1 is formed by a plurality of metal layers, for example copper layers or plates, or cutouts from a copper foil, which are structured such that within the cooler 1 between these layers, and/or through these layers, the capillary structures 8 through the metal layers 12, and vapor structures 9 through the metal layers 13, with the corresponding channels which extend at least in the lengthwise direction L result.

Figures 6 - 22 now show different embodiments for the cooler 1 which differ essentially only by the different structuring of the metal layers 12 and 13.

According to the embodiment of Figures 6 - 8, to form the capillary structures 8 metal layers 12a and 12b are used which are each provided with a plurality of continuous parallel slots, the slots 14a in the metal layers 12a extending transversely to the lengthwise direction L and the slots 14b in the metal layers 12b extending in the lengthwise direction L.

For the vapor area, or the vapor channel structure 9, there are metal layers 13a and 13b, which in turn have slots 15a and 15b, which correspond to slots 14, and slots 15a in the metal layer 13a perpendicular to the lengthwise axis L and slots 15b in the metal layer 13b in the lengthwise direction L. The design is such that the axial distance of two adjacent slots 14a and 14b is the same not only on the metal layers 12a and 12b, but is also equal to the axial distance of two slots 15a and 15b on the metal layers 13a and 13b. In any case, the width of the slots 15a and 15b is roughly 1.5 - 10 times greater than the width of the slots 14a and 14b. Furthermore, the thickness of the metal layers 13a and 13b, is roughly 1 - 3 times the thickness of the metal layers 12a and 12b.

The stacking of the metal layers 12a and 12b forms capillary structures 8 with crossing channels, which are connected to one another, at the crossing points, and which are formed by the slots 14a and 14b. Likewise, by stacking the metal layers 13a and 13b on top of one another, a vapor structure 9 is achieved with crossing channels, which are connected to one another at the crossing points, formed by the slots 15a and 15b. This approach ~~furthermore~~ results in that after joining the metal layers by the latter within the body of the cooler 1 produced in this way, continuous post-like areas 16 are formed, which extend from the top metal layer 7, which tightly seals the upper capillary area 8, as far as the lower metal layer 7, which tightly seals the lower capillary area 8, and which deliver the necessary strength for the cooler 1, and ~~especially~~ also ensure optimum heat conduction into

and out of the cooler 1. These post-like structures 16 are indicated in Figure 5 with ^athe broken line.

~~It goes without saying that~~ the metal layers 12 and 13, can also be structured differently to form structures 8 and 9. Another example is shown in Figures 9 - 16. Figure 9 shows a structured metal layer 12c for the capillary structures 8. This metal layer 12c is provided in its middle area, i.e. within a closed edge area 17, in the manner of screen with a plurality of openings 18 which are each made hexagonal and which adjoin one another similarly to a honeycomb structure. These openings 18 are each formed by crosspieces 19, which pass into one another and which surround each opening 18 in the form of a hexagonal ring structure. On the edge area 17 the openings 18 are then only partially formed.

On three corners of the hexagonal ring structure of each opening 18, the crosspieces 19 form an island 20 with an enlarged area, i.e. in the embodiment shown with a circular surface. The islands 20 are distributed such that on each opening 18, in an assumed peripheral direction one corner with an island 20, follows one corner without one such island 20. Furthermore, the structuring is chosen such that two crosspieces 19 of each opening 18, lie parallel to the lengthwise axis L, of the rectangular metal layer 12c, and in one axial direction parallel to the lengthwise axis L one island 20, is followed by an opening 18, one corner point without an island, one crosspiece 19 which extends in the direction of the lengthwise axis L, and then a new island 20, etc.

Furthermore, structuring of the metal layer 12c is not completely symmetrical to a center axis which runs perpendicularly to the lengthwise axis L, but the openings 18 are offset relative to the center axis such that it does not intersect the crosspieces 19, which run parallel to the lengthwise axis L, but intersects the islands. In this way, to form the capillary structures 8, it is possible to provide in alternation, one metal layer 12c in the form shown in Figure 9, as a layer N (Figure 11), and as the subsequent layer N + 1, one metal layer 12c in a layer turned around the center axis (Figure 12), following one another in order to obtain the structure shown in Figure 13 in which the islands 20 of these layers N and (N + 1) lie on one another, while in the middle of each opening 18, of one layer, there is an area of the adjacent layer on which three crosspieces 19 meet one another without an island 20, as is shown in Figure 13. With the described structuring of the metal layers 12c therefore using the same metal layers, very finely structured capillary areas 8 with channels widely branched in all three solid axes can be produced simply by turning every other layer.

Figure 10 shows ~~in~~ a representation like Figure 9, ^{but with a} ~~the~~ metal layer 13c for producing the vapor channel structure 9. The metal layer 13c in its structuring corresponds to the metal layer 12c, and differs from it simply in that some of the crosspieces 19, which run transversely to the lengthwise axis L, were omitted, such that the remaining crosspieces 19, together with the islands 20, form zig-zag band-like structures 21', which extend in the lengthwise direction L, with passages 21, which lie in between and

which extend in the lengthwise direction. According to Figure 16, the vapor channel area 9 is formed by at least two metal layers 13c being stacked on top of one another, and connected to one another, such that every other metal layer 13c is turned around the center axis so that also in the vapor area 9, the islands 20 of the individual layers 13c, come to rest on one another and in this way form continuous, post-like structures 16. The passages 21 yield flow channels with larger effective flow cross section for the vapor area 9.

Figures 17 - 22 show as further embodiments, metal layers 12d for forming the capillary structures 8, and the metal layers 13d, for forming the vapor channel structure 9. Figures 17 and 18 in turn show the same metal layer 12d, but Figure 18 in a layer turned around the center axis relative to Figure 17. Likewise, figures 20 and 21 show the same metal layer 13d, but in Figure 21 in a layer turned around the center axis relative to Figure 20.

The metal layer 12d is structured in the manner of the screen within the closed edge area 17, with a plurality of angled openings 22 which are oriented with the angle bisector of their angle segments parallel to the lengthwise axis L.

To form the respective capillary structure 8, at least one metal layer 12 in an unturned ^{form} and one metal layer 12 in a turned form, are placed on top of one another, and are connected to one another, such that then the partially overlapping openings yield passages 23, via which the channels formed by the openings 22, in the individual layer, are joined to one another, into a widely branched channel structure, and in addition, post-like areas 16 result.

As Figures 17 and 18 show, the openings 22 are each located in several rows which follow one another in the direction of this lengthwise axis and which run perpendicular to the lengthwise axis L, the openings 22 each being offset from row to row on gaps.

The metal layer 13d, shown in Figures 20 and 22, differs from the metal layers 12d, simply in that, in addition to the openings 22, there are continuous openings which are bordered on the end by the edge area 17, and which extend in the lengthwise direction L, such that in turn band-like structures 24' result, which extend in the lengthwise direction and which also have openings 22. By placing one unturned metal layer 13d, and one turned metal layer 13d, on top of one another on the band-like structures, additional channels are formed which are connected to one another via the passages 23, and also the post-like areas 16, which adjoin the areas 16 in the capillary areas 8 and are added to the continuous posts 16 between the metal layers 7.

Figure 23 ¹⁵ in another representation according to Figure 1. ~~as another embodiment~~ shows a cooler 1a in the form of a heat pipe. In this embodiment, the cooler 1a, or its body, is in turn formed from several copper or metal layers which are joined to one another lying stacked one top of one another to the cooler 1a. The metal layers 12e for the capillary areas 8 are made such that they are each provided on one surface side with several groove-like depressions 25 which extend in the lengthwise direction and which are produced by etching, stamping, ^{or} by machining which removes material or shavings, or in some other way. The

depressions 25 each end in a continuous opening 26, which is provided at a distance from a closed edge area. The metal layers 12e are then turned alternately to form the capillary areas 8, and are placed unturned on top of one another such that each depression 25 of one layer 12e is added to one depression 25 of the adjacent layer 12e to form a channel, as is shown in Figure 24. On the two ends, or areas 2 and 3, these channels then empty according to Figure 25, into spaces which are formed by openings 26, in the metal layers 12e and via which the channels are connected to the vapor channel 9.

The metal layers 13e, which form the vapor area, or the vapor structure, are made, for example, according to Figure 27, similarly to layers 12e, simply with depressions 27 of greater width and/or depth, or by the fact that according to Figure 28, in the metal layers 13e there is one opening 28 with a large area each.

Figure 29 shows ^ain one representation similar to Figure 24, ~~another possible embodiment of the cooler 1a~~ ^{is disclosed} in which the metal layers 12e for forming the capillary structure, are not turned alternately, but are each in the same orientation so that the depressions 25 form especially fine channels.

In the above described embodiments it was assumed that the channels which form the capillary structures are free channels. ~~Basically~~ ^{It} is also possible to place an auxiliary material which supports and/or causes a capillary effect in these or other structured or shaped channels, especially also in channels with large effective cross sections, for example, in the form of a powder, for example in the form of a powder consisting of at

Copper is suited for the metal layers, the metal layers then for example being joined superficially to one another using DCB technology or ~~by~~ active soldering. For ~~example~~ also Aluminum or an aluminum alloy is ^{also} suited for the metal layers. In this case) the metal layers are connected to one another for ~~example~~ by vacuum soldering. The thickness of the metal layers ^{can} is roughly ^{be} between 100 and 1000 microns and the structure widths in the area are between 50 and 1000 microns.

"Substitute Specification"

A COOLER FOR ELECTRICAL COMPONENTS

BACKGROUND OF THE INVENTION

The invention relates to a cooler, in particular, a
5 cooler for electrical components, in the form of a heat pipe.

Coolers of this type are fundamentally known and are
based on the principle of vaporization and condensation of a
coolant, or heat transport medium, housed in the closed interior
of the cooler. Generally these coolers have a round structure
10 (US 35 37 514). Lengthwise grooves are used as the capillary
structure. These round coolers must be connected to a flat
carrier on which the components to be cooled are located. These
carriers yield additional heat transfer or thermal resistance.

Furthermore, it is also known to have a flat design for
15 this cooler (US 56 42 775). These known coolers consist of a
block in which tubular channels are formed. Production is
complex and expensive.

Furthermore, it is also known to have a cuboidal cooler
(US 4,957,803); its housing consists of a plurality of metal
20 layers stacked on top of one another and connected superficially
to one another, which are structured and arranged such that
within the body, slots yield crossing channels which are joined
to one another at the crossing points. This known design is only
suited as a thermal spreader. There are no differing vapor
25 channel and capillary structures. In addition, heat transport
over long distances is necessary.

The object of the invention is to devise a cooler with
improved properties.

Summary of the Invention

The cooler as claimed in the invention is characterized
by a simple and economical production. Transmission of heat
energy from the outside, into the vaporization area, into the
cooler, or from the condensation area to the outside over a short
35 distance is possible by posts which are located in the area of
the capillary structure and which are formed by the metal layers.

Furthermore, the cooler has a vapor channel area or a vapor channel structure with a large flow cross section, yielding optimum cooling output.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

The invention is detailed below using the following figures:

Figure 1 shows, in a simplified perspective view, a cooler in the form of a flat, plate-shaped or cuboidal heat pipe;

10 Figure 2 shows a section along line I - I of Figure 1;

Figures 3 and 4 show other possible embodiments of the cooler of the invention;

15 Figure 5 shows in an enlarged partial representation, and in a side view, the heat pipe, as claimed in the invention, formed by a stack of several metal layers;

Figures 6 and 7 each show in a simplified view, and in an overhead view, two individual or metal layers for example of copper for the capillary area (Figure 6) and the vapor channel area (Figure 7);

20 Figure 8 shows, in a partial schematic, a section through the capillary area, or through the vapor area, of Figures 6 and 7;

Figures 9 and 10 show, in an overhead view, structured metal layers for the capillary area, or the capillary structure, (Figure 9) or for the vapor channel area or the vapor channel structure (Figure 10) in another possible embodiment of the invention;

25 Figures 11 and 12 each show, in a partial representation, the two stacked metal layers of Figure 9 for the capillary area;

30 Figure 13, in a partial representation, shows an overhead view of a partial structure of the capillary area formed by two successive metal layers of Figures 11 and 12;

35 Figures 14, 15 and 16 show representations similar to Figures 11, 12 and 13 for the vapor channel area;

Figures 17 and 18 show, in an enlarged partial representation, and in an overhead view, similar to Figures 11 and 12, individual metal layers for the capillary area of another possible embodiment;

Figure 19 shows, in a partial representation, an overhead view of a partial structure of the capillary area formed by two successive metal layers of Figures 17 and 18;

Figures 20, 21 and 22 show representations similar to Figures 17, 18 and 19, but for the vapor channel area;

Figure 22 shows the two layers of Figures 20 and 21 on top of one another for forming the vapor channel area;

Figure 23 shows, in the representation of Figure 1, another possible embodiment of the invention;

Figure 24 shows a section along line II-II of Figure 23, for the sake of simplicity only, the capillary area, or the capillary structure being shown;

Figure 25 shows a section along line III-III or IV - IV of Figure 23, for the sake of simplicity only the capillary area or the capillary structure being shown;

Figure 26 shows, in a simplified representation, and in an overhead view, one metal layer for the capillary area;

Figures 27 and 28 each show, in a simplified representation, and in an overhead view, two additional embodiments of one metal layer for the vapor channel area; and

Figure 29 shows, a representation similar to Figure 24, another possible embodiment.

DETAILED DESCRIPTION OF THE INVENTION

In Figures 1 - 22, a heat sink or cooler for dissipating the heat of a heat source is labeled 1. The cooler 1 is built as a heat pipe, but in contrast to the known heat pipe arrangements, the cooler 1 has a very flat plate-shape with flat surfaces on the top and bottom. In the embodiment shown in Figure 1, the cooler 1 is shown in an overhead view with a

rectangular peripheral line, or with the shape of a very flat cuboid, which is rectangular in an overhead view.

Generally the cooling or vaporizer area (first area) is labeled 2, and the second area for heat dissipation, or the condenser area, is labelled 3. The two areas are offset against one another in the lengthwise direction L, of the plate-shaped cooler 1, and on either side of a center plane M, which intersects the cooler 1, and its lengthwise sides vertically. The heat dissipated on the area 2, to the cooler 1 is labelled with an arrow P1, and the heat dissipated by the cooler 1, on area 3, is labelled by an arrow P2. The heat source is formed by the semiconductor power components which are provided on the closed flat top and/or bottom of the cooler 1, on area 2, the flat top and/or bottom being formed by one metal layer 7 (metal foil or plate).

In Figure 2, these semiconductor power components, or chips, which produce heat loss, are labelled 4-6. For electrical insulation on the top and/or bottom of the cooler 1, there is provided, at least in the area of chips 4-6, one ceramic layer 7', which is connected in a suitable manner to the closed metal layer 7, which forms the top and bottom of the cooler.

The inner structure of the cooler 1, and how it works, in general, follow from Figure 2. The inner structure consists of three areas which each extend over the entire cooler, and which are stacked on top of one another, between the top and bottom metal layer 7, more specifically it consists of two outer capillary structures or areas 8, and a middle vapor channel, or vapor channel area, or vapor channel structure 9. The capillary areas 8 are formed by a host of channels which extend between the two areas 2 and 3 and are connected, in at least these areas to the vapor channel or the vapor channel area 9. The vapor channel is a continuous channel which extends over the entire length and width of the cooler 1, or is formed, in the manner detailed below, by a structure of several individual channels, the entire

cross section of the vapor channel being much larger compared to the overall cross section of the capillary areas 8.

The interior of the cooler 1 is partially filled with a coolant which vaporizes when heated. In the simplest case water, also in mixture with an additive, for example, methanol, is suited as the coolant.

How the cooler 1 works is based on the fact that the heat which has flowed onto the area 2 vaporizes the coolant there within the cooler and the vapor then flows in the vapor channel 9 from the area 2 in the direction to the area 3, i.e. in the direction of the arrow A of Figure 2. On the area 3, the heat is dissipated to the outside according to arrow P2. This leads to condensation of the coolant, which as condensate travels into the capillary areas 8, and from there under capillary action flows back opposite the arrow A of Figure 2 on the area 2, where then again vaporization of the medium takes place by the absorbed heat P1, etc. The cooler 1, with reference to the vaporizable coolant provided in the interior of this cooler, forms a closed system, as is inherently known of heat pipe systems.

Figure 3 shows again in a simplified representation, the cooler 1, and on the area 3, cooling elements, or cooling sheets 10, being provided on the outside, which with a large surface cause dissipation of the heat to the outside according to arrow P2, and through or around, by an air stream generated by fan flows.

Figure 4 shows in a similar representation to Figure 3, an auxiliary cooler 11 which is located on the area 3 and through which a coolant or heat-transporting medium of an external cooling system flows, for example, cooling water of an external cooling circuit. This auxiliary cooler 11 can be formed directly on the area 3 of the cooler 1 by several metal layers which are stacked on top of one another and which are joined superficially to one another and in the housing of the auxiliary cooler 11 form internal, closed cooling channels through which the external coolant flows. In particular, it is possible to

form the auxiliary cooler 11 as a so-called microcooler, as is described for example in DE 197 10 783.

As is indicated in Figure 5 with 12 and 13, the cooler 1 is formed by a plurality of metal layers, for example copper layers or plates, or cutouts from a copper foil, which are structured such that within the cooler 1 between these layers, and/or through these layers, the capillary structures 8 through the metal layers 12, and vapor structures 9 through the metal layers 13, with the corresponding channels which extend at least in the lengthwise direction L result.

Figures 6 - 22 show different embodiments for the cooler 1 which differ essentially only by the different structuring of the metal layers 12 and 13.

According to the embodiment of Figures 6 - 8, to form the capillary structures 8 metal layers 12a and 12b are used which are each provided with a plurality of continuous parallel slots, the slots 14a in the metal layers 12a extending transversely to the lengthwise direction L and the slots 14b in the metal layers 12b extending in the lengthwise direction L.

For the vapor area, or the vapor channel structure 9, there are metal layers 13a and 13b, which in turn have slots 15a and 15b, which correspond to slots 14, and slots 15a in the metal layer 13a perpendicular to the lengthwise axis L and slots 15b in the metal layer 13b in the lengthwise direction L. The design is such that the axial distance of two adjacent slots 14a and 14b is the same not only on the metal layers 12a and 12b, but is also equal to the axial distance of two slots 15a and 15b on the metal layers 13a and 13b. In any case, the width of the slots 15a and 15b is roughly 1.5 - 10 times greater than the width of the slots 14a and 14b. Furthermore, the thickness of the metal layers 13a and 13b, is roughly 1 - 3 times the thickness of the metal layers 12a and 12b.

The stacking of the metal layers 12a and 12b forms capillary structures 8 with crossing channels, which are connected to one another, at the crossing points, and which are

formed by the slots 14a and 14b. Likewise, by stacking the metal layers 13a and 13b on top of one another, a vapor structure 9 is achieved with crossing channels, which are connected to one another at the crossing points, formed by the slots 15a and 15b. This approach results in that after joining the metal layers by the latter within the body of the cooler 1 produced in this way, continuous post-like areas 16 are formed, which extend from the top metal layer 7, which tightly seals the upper capillary area 8, as far as the lower metal layer 7, which tightly seals the lower capillary area 8, and which deliver the necessary strength for the cooler 1, and also ensure optimum heat conduction into and out of the cooler 1. These post-like structures 16 are indicated in Figure 5 with a broken line.

The metal layers 12 and 13, can also be structured differently to form structures 8 and 9. Another example is shown in Figures 9 - 16. Figure 9 shows a structured metal layer 12c for the capillary structures 8. This metal layer 12c is provided in its middle area, i.e. within a closed edge area 17, in the manner of screen with a plurality of openings 18 which are each made hexagonal and which adjoin one another similarly to a honeycomb structure. These openings 18 are each formed by crosspieces 19, which pass into one another and which surround each opening 18 in the form of a hexagonal ring structure. On the edge area 17 the openings 18 are only partially formed.

On three corners of the hexagonal ring structure of each opening 18, the crosspieces 19 form an island 20 with an enlarged area, i.e. in the embodiment shown with a circular surface. The islands 20 are distributed such that on each opening 18, in an assumed peripheral direction one corner with an island 20, follows one corner without one such island 20. Furthermore, the structuring is chosen such that two crosspieces 19 of each opening 18, lie parallel to the lengthwise axis L, of the rectangular metal layer 12c, and in one axial direction parallel to the lengthwise axis L one island 20, is followed by an opening 18, one corner point without an island, one crosspiece

19 which extends in the direction of the lengthwise axis L , and then a new island 20, etc.

Furthermore, structuring of the metal layer 12c is not completely symmetrical to a center axis which runs perpendicularly to the lengthwise axis L , but the openings 18 are offset relative to the center axis such that it does not intersect the crosspieces 19, which run parallel to the lengthwise axis L , but intersects the islands. In this way, to form the capillary structures 8, it is possible to provide in alternation, one metal layer 12c in the form shown in Figure 9, as a layer N (Figure 11), and as the subsequent layer $N + 1$, one metal layer 12c in a layer turned around the center axis (Figure 12), following one another in order to obtain the structure shown in Figure 13 in which the islands 20 of these layers N and $(N + 1)$ lie on one another, while in the middle of each opening 18, of one layer, there is an area of the adjacent layer on which three crosspieces 19 meet one another without an island 20, as is shown in Figure 13. With the described structuring of the metal layers 12c therefore using the same metal layers, very finely structured capillary areas 8 with channels widely branched in all three solid axes can be produced simply by turning every other layer.

Figure 10 shows a representation like Figure 9, with a metal layer 13c for producing the vapor channel structure 9. The metal layer 13c in its structuring corresponds to the metal layer 12c, and differs from it simply in that some of the crosspieces 19, which run transversely to the lengthwise axis L , were omitted, such that the remaining crosspieces 19, together with the islands 20, form zig-zag band-like structures 21', which extend in the lengthwise direction L , with passages 21, which lie in between and which extend in the lengthwise direction. According to Figure 16, the vapor channel area 9 is formed by at least two metal layers 13c being stacked on top of one another, and connected to one another, such that every other metal layer 13c is turned around the center axis so that also in the vapor area 9, the islands 20 of the individual layers 13c, come to rest

on one another and in this way form continuous, post-like structures 16. The passages 21 yield flow channels with larger effective flow cross section for the vapor area 9.

Figures 17 - 22 show as further embodiments, metal layers 12d for forming the capillary structures 8, and the metal layers 13d, for forming the vapor channel structure 9. Figures 17 and 18 in turn show the same metal layer 12d, but Figure 18 in a layer turned around the center axis relative to Figure 17. Likewise, figures 20 and 21 show the same metal layer 13d, but in Figure 21 in a layer turned around the center axis relative to Figure 20.

The metal layer 12d is structured in the manner of the screen within the closed edge area 17, with a plurality of angled openings 22 which are oriented with the angle bisector of their angle segments parallel to the lengthwise axis L.

To form the respective capillary structure 8, at least one metal layer 12 in an unturned form and one metal layer 12 in a turned form, are placed on top of one another, and are connected to one another, such that then the partially overlapping openings yield passages 23, via which the channels formed by the openings 22, in the individual layer, are joined to one another, into a widely branched channel structure, and in addition, post-like areas 16 result.

As Figures 17 and 18 show, the openings 22 are each located in several rows which follow one another in the direction of this lengthwise axis and which run perpendicular to the lengthwise axis L, the openings 22 each being offset from row to row on gaps.

The metal layer 13d, shown in Figures 20 and 22, differs from the metal layers 12d, simply in that, in addition to the openings 22, there are continuous openings which are bordered on the end by the edge area 17, and which extend in the lengthwise direction L, such that in turn band-like structures 24' result, which extend in the lengthwise direction and which also have openings 22. By placing one unturned metal layer 13d,

and one turned metal layer 13d, on top of one another on the band-like structures, additional channels are formed which are connected to one another via the passages 23, and also the post-like areas 16, which adjoin the areas 16 in the capillary areas 8 and are added to the continuous posts 16 between the metal layers 7.

Figure 23 is another representation according to Figure 1. Figure 23 shows a cooler 1a in the form of a heat pipe. In this embodiment, the cooler 1a, or its body, is in turn formed from several copper or metal layers which are joined to one another lying stacked one top of one another to the cooler 1a. The metal layers 12e for the capillary areas 8 are made such that they are each provided on one surface side with several groove-like depressions 25 which extend in the lengthwise direction and which are produced by etching, stamping, or by machining which removes material or shavings, or in some other way. The depressions 25 each end in a continuous opening 26, which is provided at a distance from a closed edge area. The metal layers 12e are then turned alternately to form the capillary areas 8, and are placed unturned on top of one another such that each depression 25 of one layer 12e is added to one depression 25 of the adjacent layer 12e to form a channel, as is shown in Figure 24. On the two ends, or areas 2 and 3, these channels then empty according to Figure 25, into spaces which are formed by openings 26 in the metal layers 12e and via which the channels are connected to the vapor channel 9.

The metal layers 13e, which form the vapor area, or the vapor structure, are made, for example, according to Figure 27, similarly to layers 12e, simply with depressions 27 of greater width and/or depth, or by the fact that according to Figure 28, in the metal layers 13e there is one opening 28 with a large area each.

Figure 29 shows a representation similar to Figure 24. The cooler 1a is disclosed in which the metal layers 12e for forming the capillary structure, are not turned alternately,

but are each in the same orientation so that the depressions 25
form especially fine channels.

5 In the above described embodiments it was assumed that
the channels which form the capillary structures are free
channels. It is also possible to place an auxiliary material
which supports and/or causes a capillary effect in these or other
structured or shaped channels, also in channels with large
effective cross sections, for example, in the form of a powder,
for example in the form of a powder consisting of at least one
10 metal and/or metal oxide, for example copper and/or aluminum
and/or copper oxide and/or aluminum oxide, and/or in the form of
a powder consisting of at least one ceramic, and/or in the form
of a powder from mixtures of the aforementioned substances, as
is indicated by 29 in Figure 24.

15 Copper is suited for the metal layers, the metal layers
being joined superficially to one another using DCB technology
or active soldering. Aluminum or an aluminum alloy is also
suited for the metal layers. In this case, the metal layers are
connected to one another by vacuum soldering. The thickness of
20 the metal layers can roughly be between 100 and 1000 microns and
the structure widths in the area are between 50 and 1000 microns.

Reference number list

	1,1a	cooler
	2, 3	area
	4 - 6	component
5	7	metal layer
	7'	ceramic layer
	8	capillary area
	9	vapor channel area
	10	cooling element
10	11	auxiliary cooler
	12,12a,12b	metal layer
	12c,12d,12e	metal layer
	13,13a,13b	metal layer
	13c,13d,13e	metal layer
15	14a, 14b	slot
	15a, 15b	slot
	16	posts
	17	edge area
	18	opening
20	19	crosspiece
	20	island
	21	opening
	21'	structure
	22	opening
25	23	passage
	24	opening
	24'	structure
	25	depression
	26	opening
30	27	depression
	28	opening
	29	auxiliary material

[illegible]

	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

Reference number list

1,1a	cooler
2, 3	area
4 - 6	component
7	metal layer
7'	ceramic layer
8	capillary area
9	vapor channel area
10	cooling element
11	auxiliary cooler
12,12a,12b	metal layer
12c,12d,12e	metal layer
13,13a,13b	metal layer
13c,13d,13e	metal layer
14a, 14b	slot
15a, 15b	slot
16	posts
17	edge area
18	opening
19	crosspiece
20	island
21	opening
21'	structure
22	opening
23	passage
24	opening
24'	structure

25	depression
26	opening
27	depression
28	opening
29	auxiliary material

Abstract of the Disclosure

The invention relates to a novel design of a cooler in the form of a heat pipe, with a housing in which an interior space closed to the outside is formed to hold a liquid, vaporizable coolant or heat-transport medium.

Fig.1

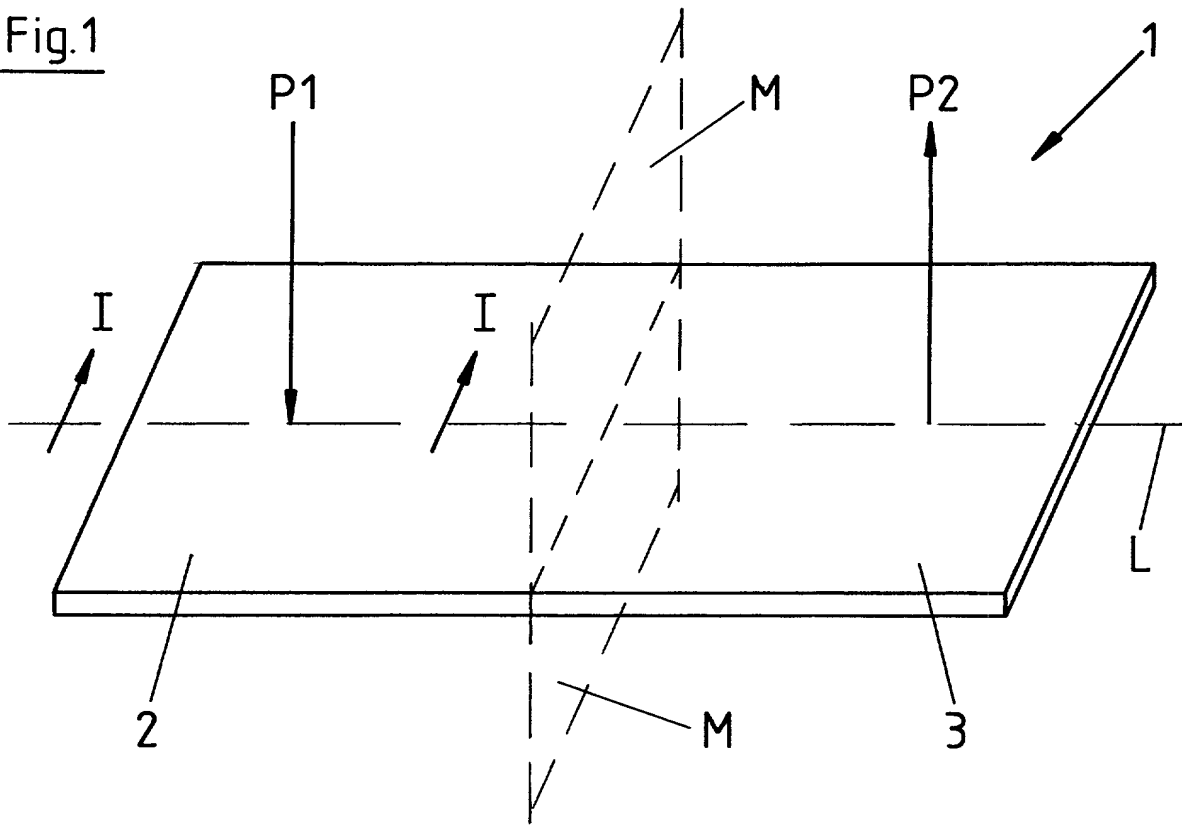


Fig.2

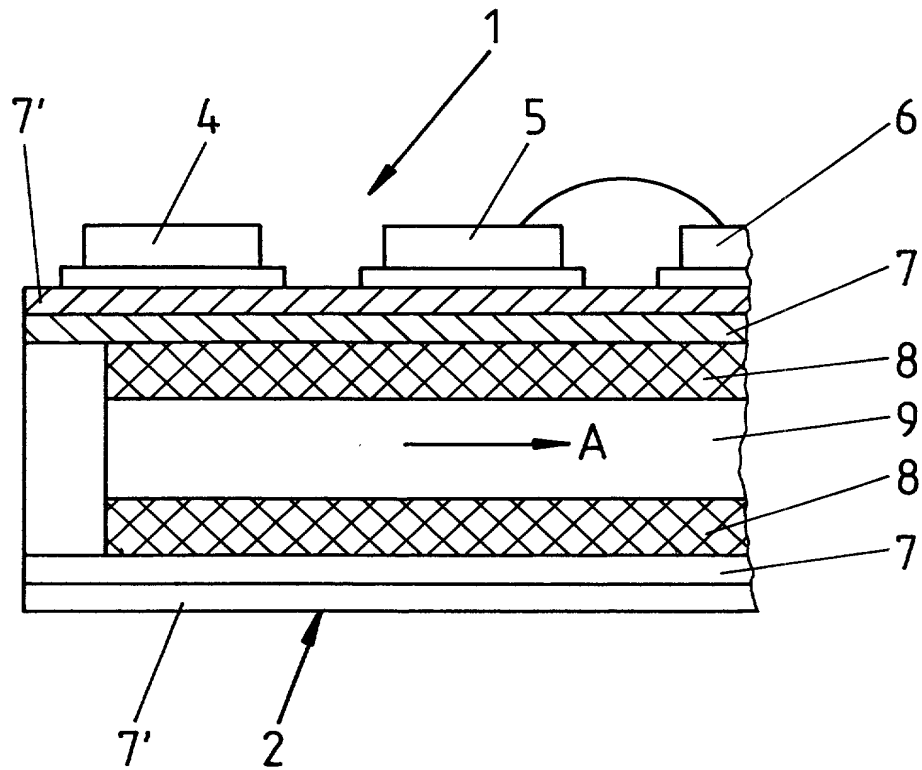


Fig.3

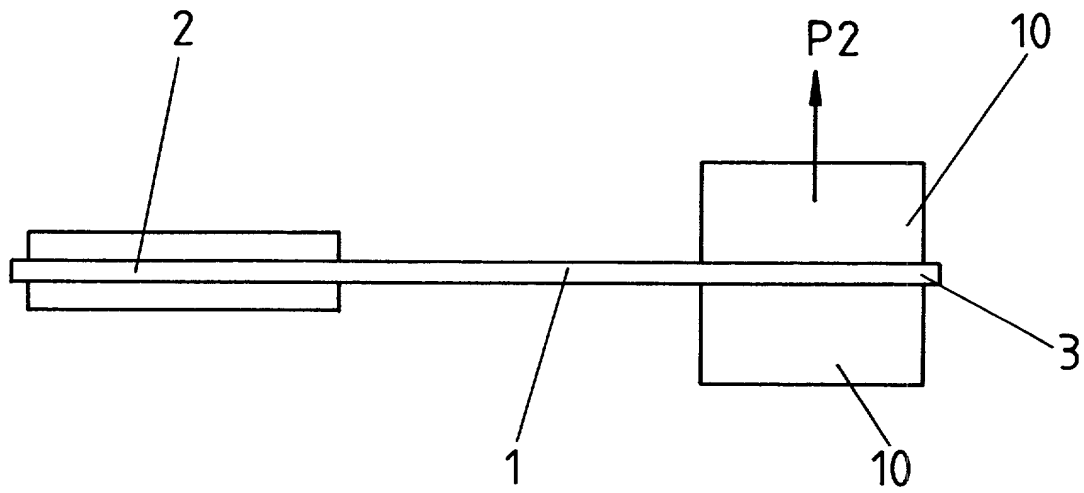


Fig.4

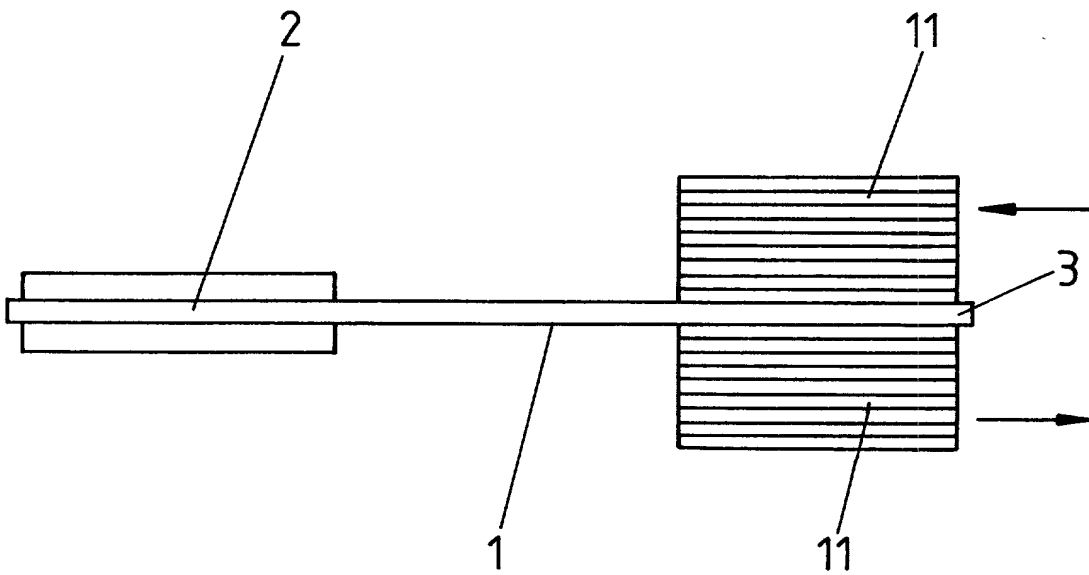


Fig.5

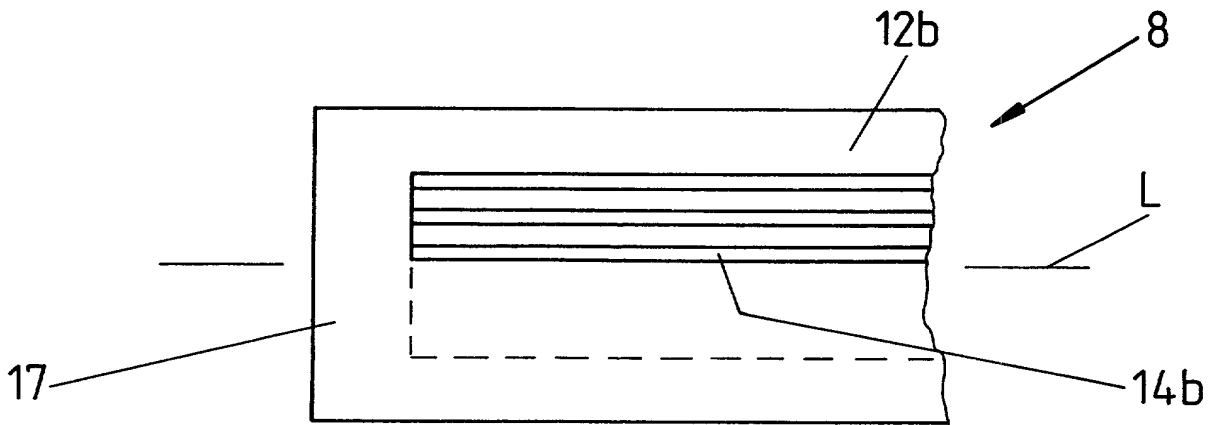
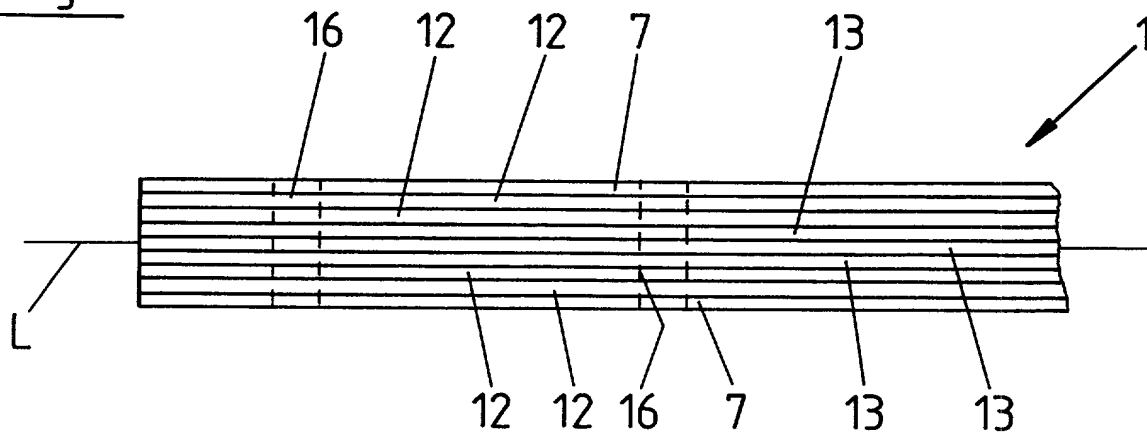


Fig.6



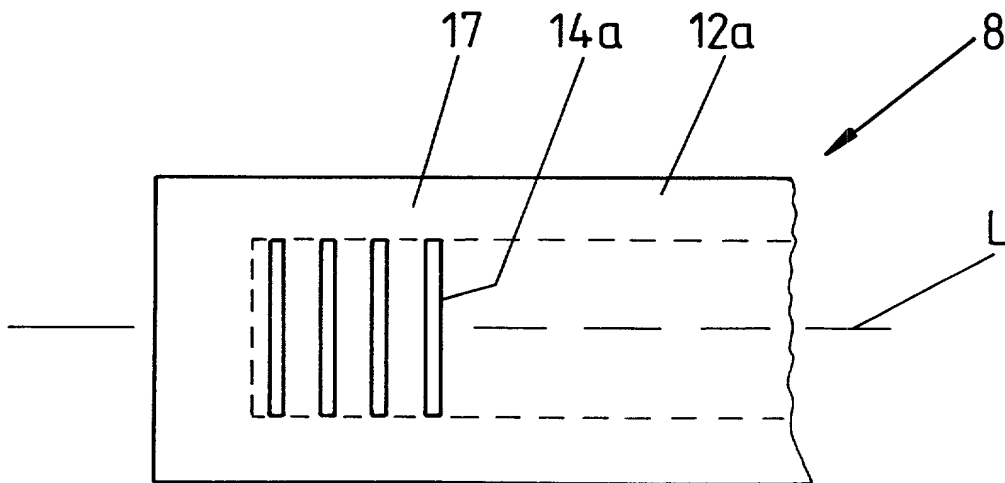


Fig. 7

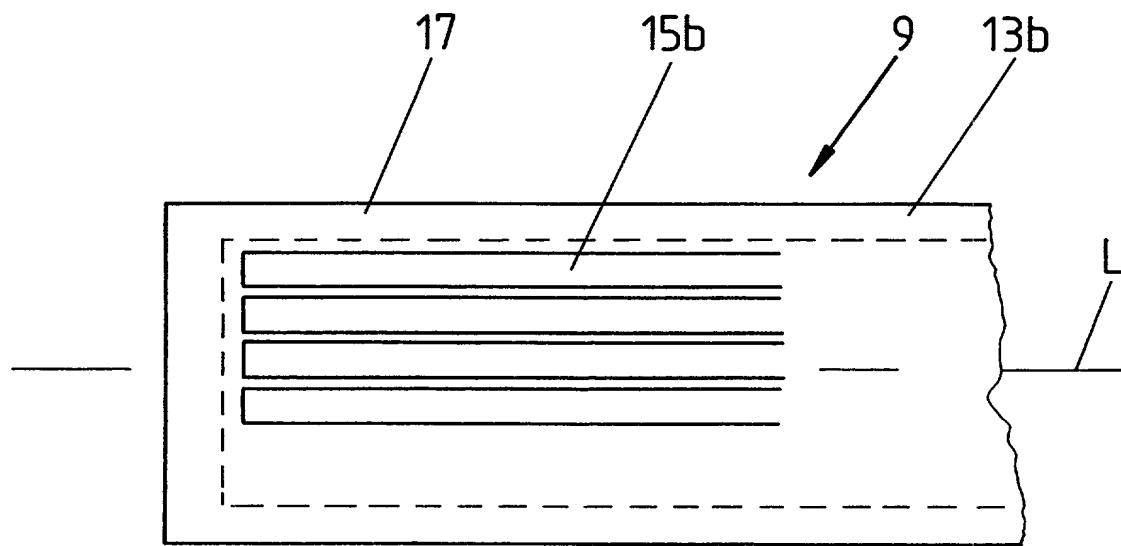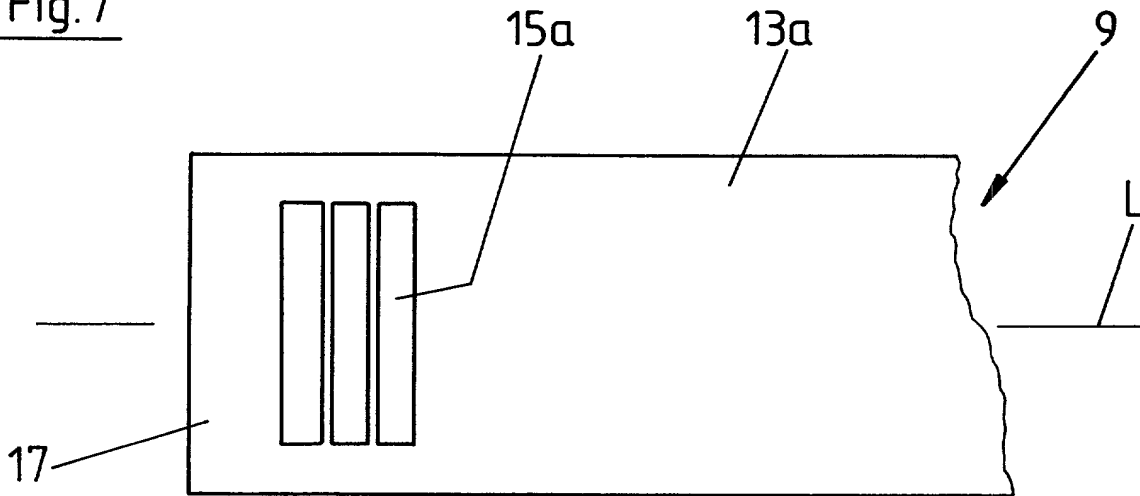

660240 88246260

Fig.8

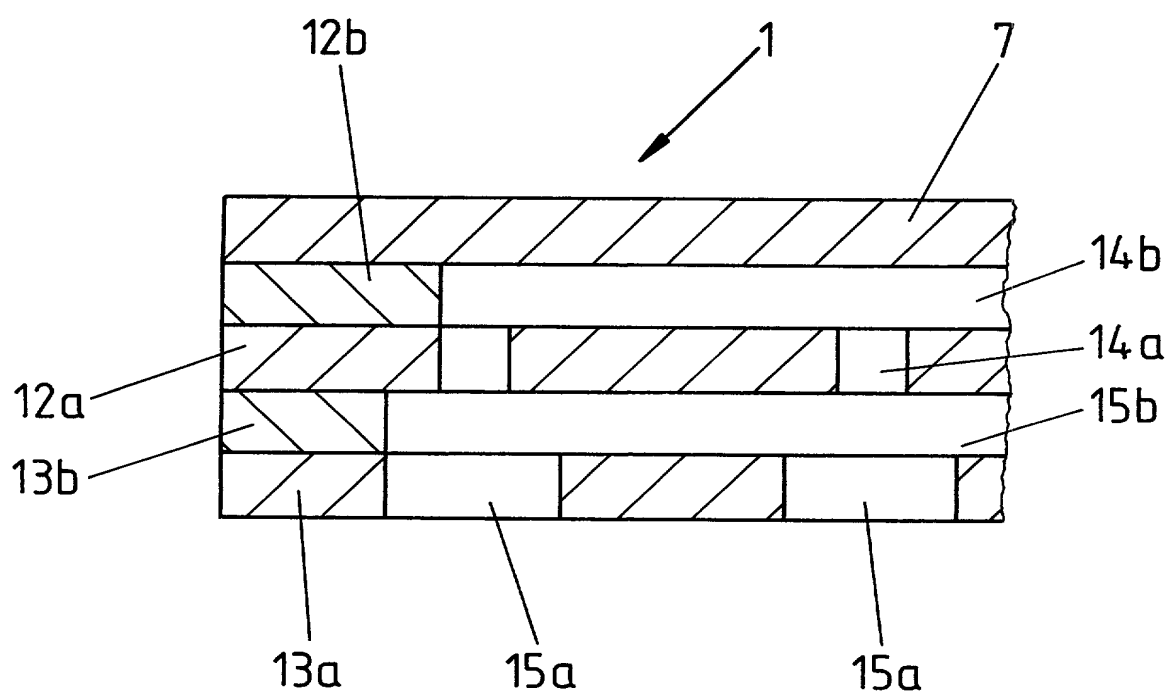


Fig. 9

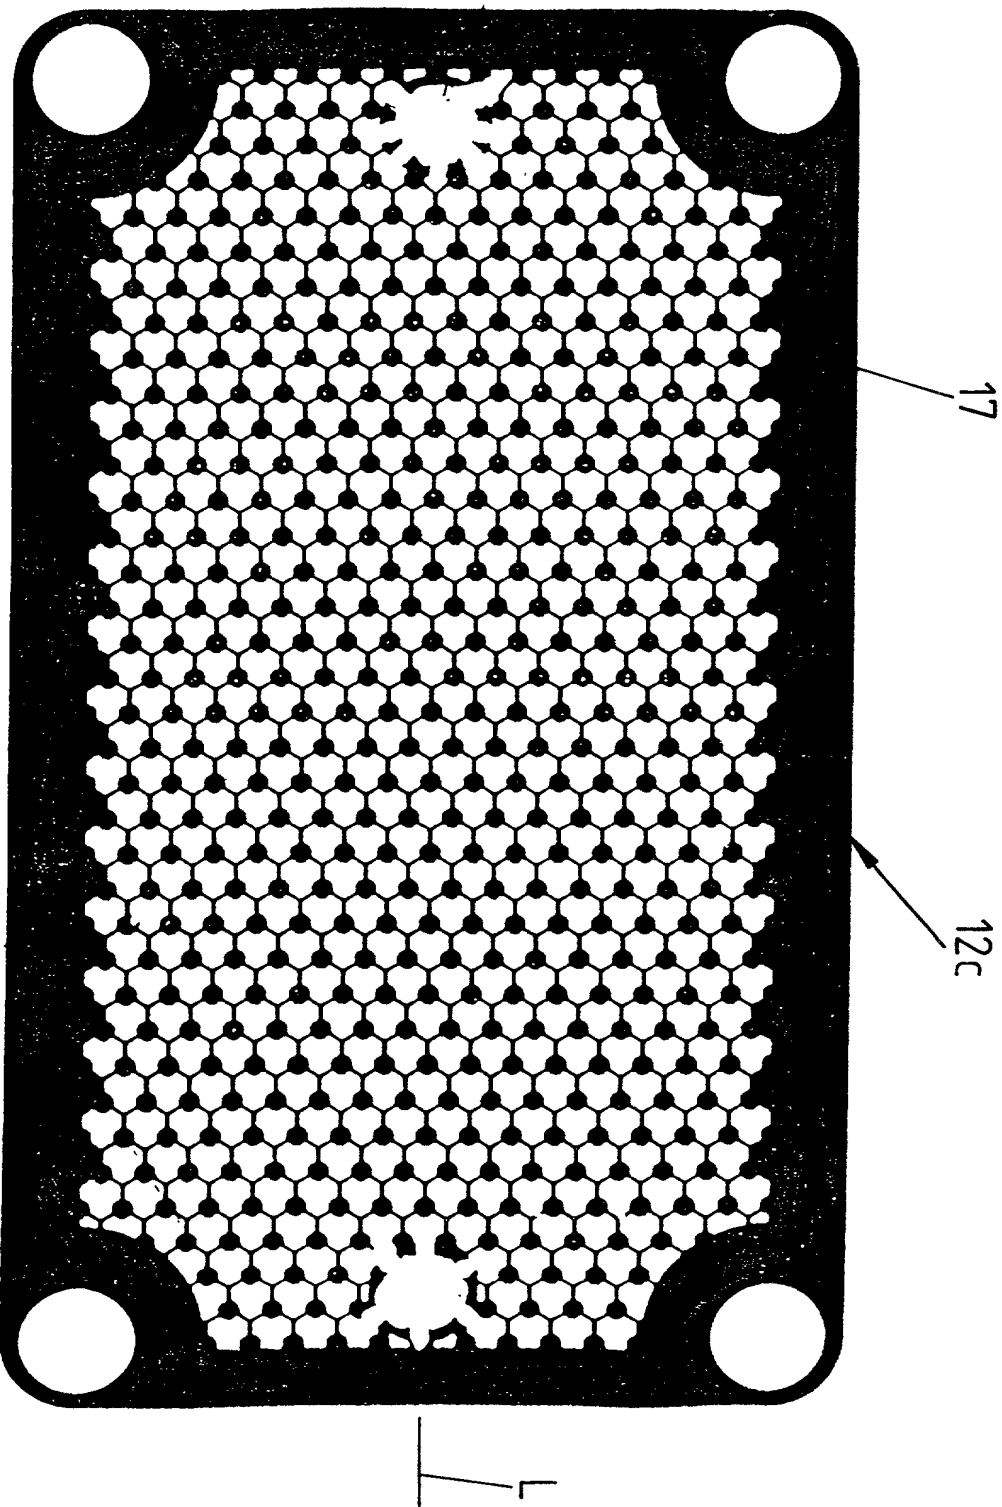


Fig. 10

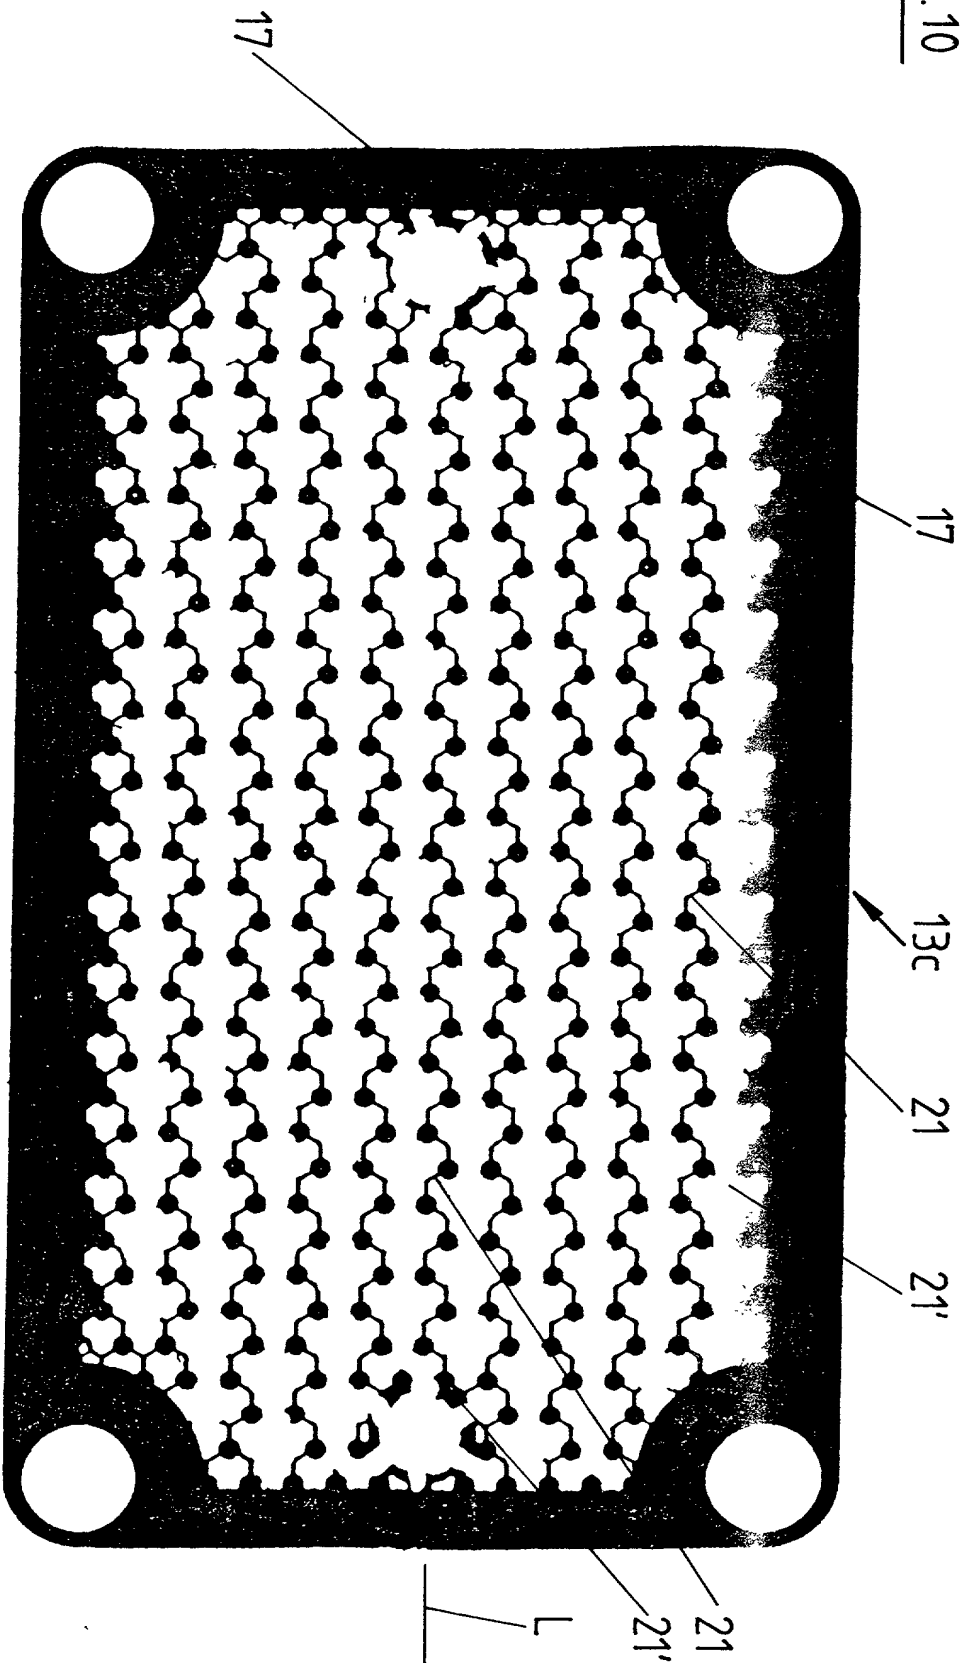


Fig.11

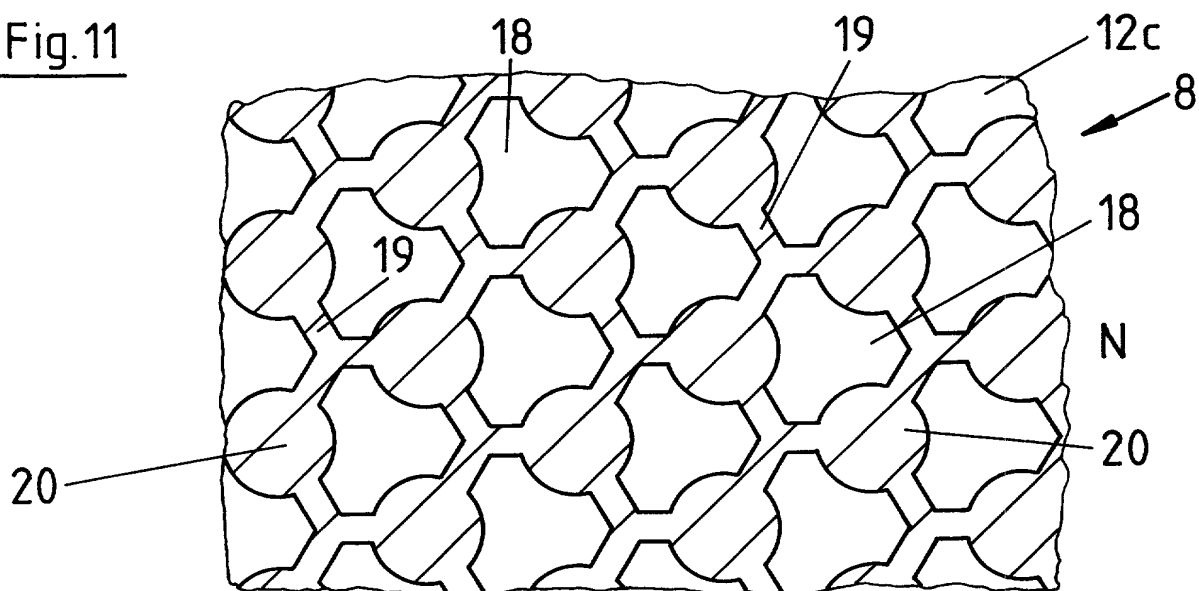


Fig.12

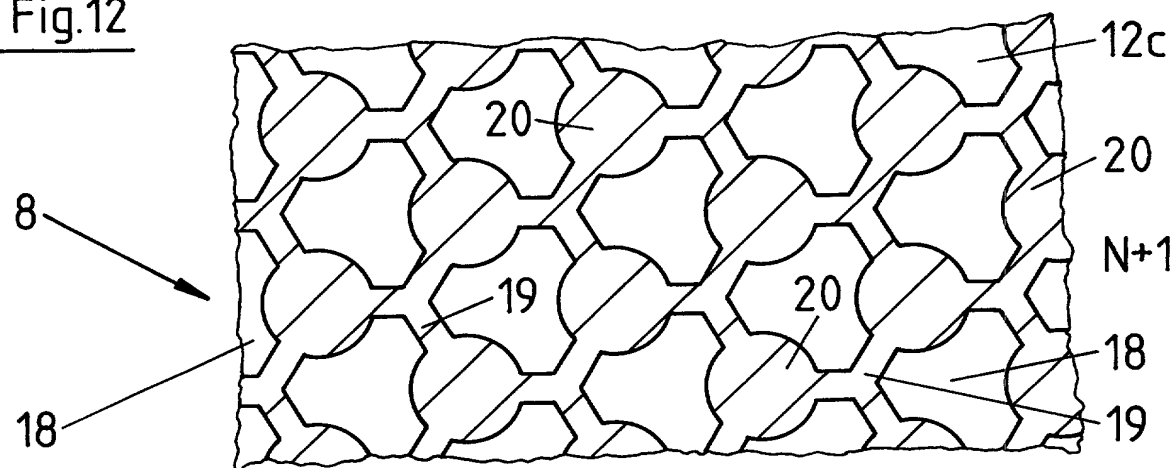


Fig.13

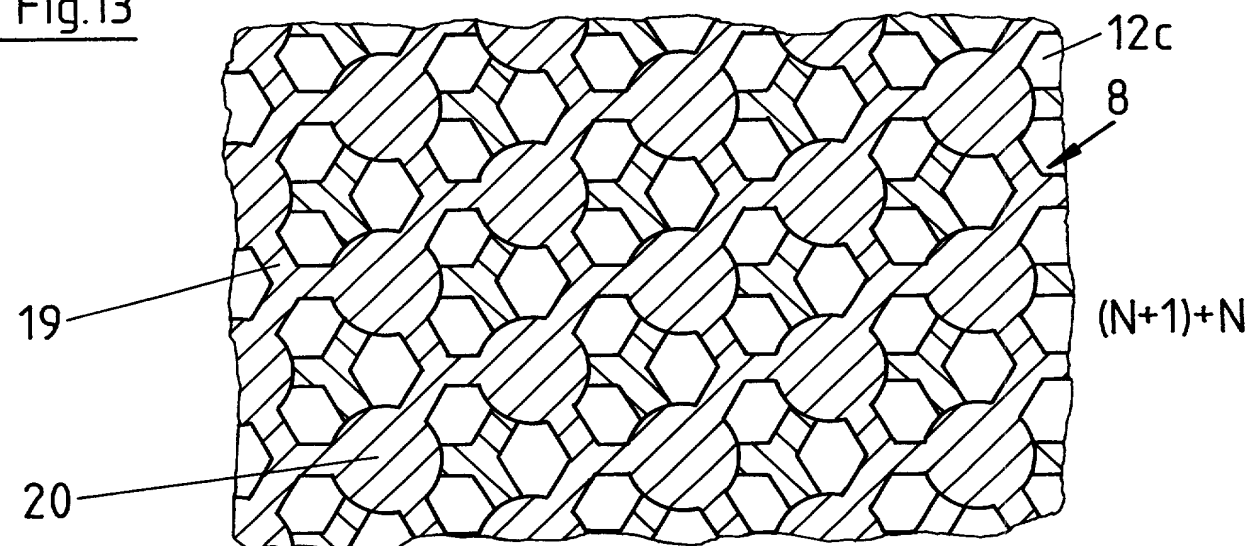


Fig.14

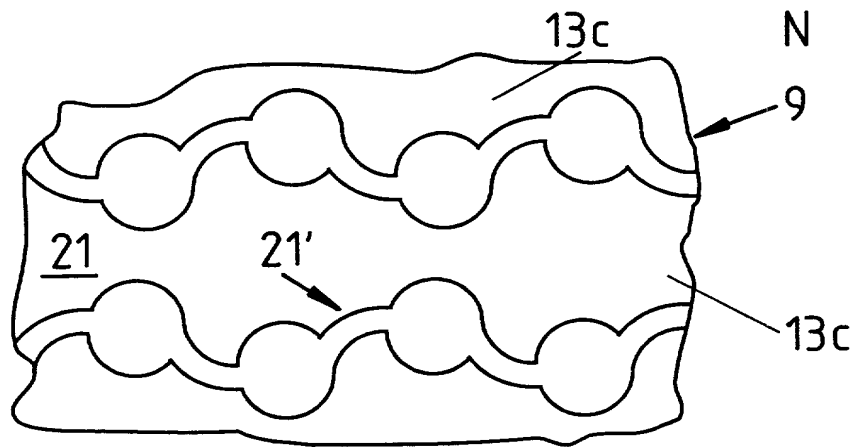


Fig.15

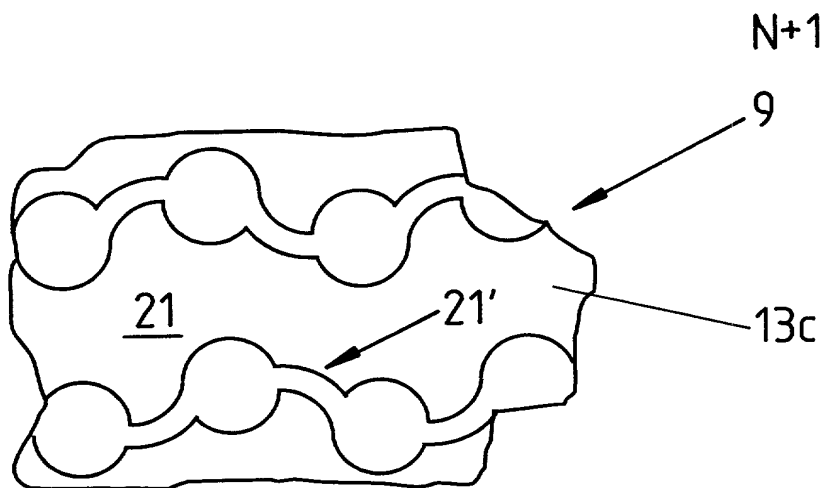


Fig.16

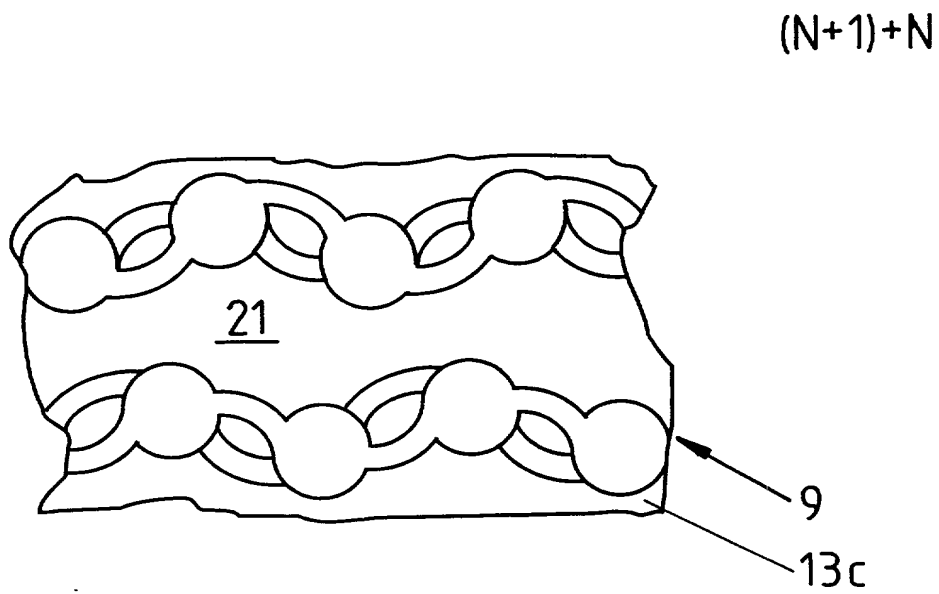


Fig.17

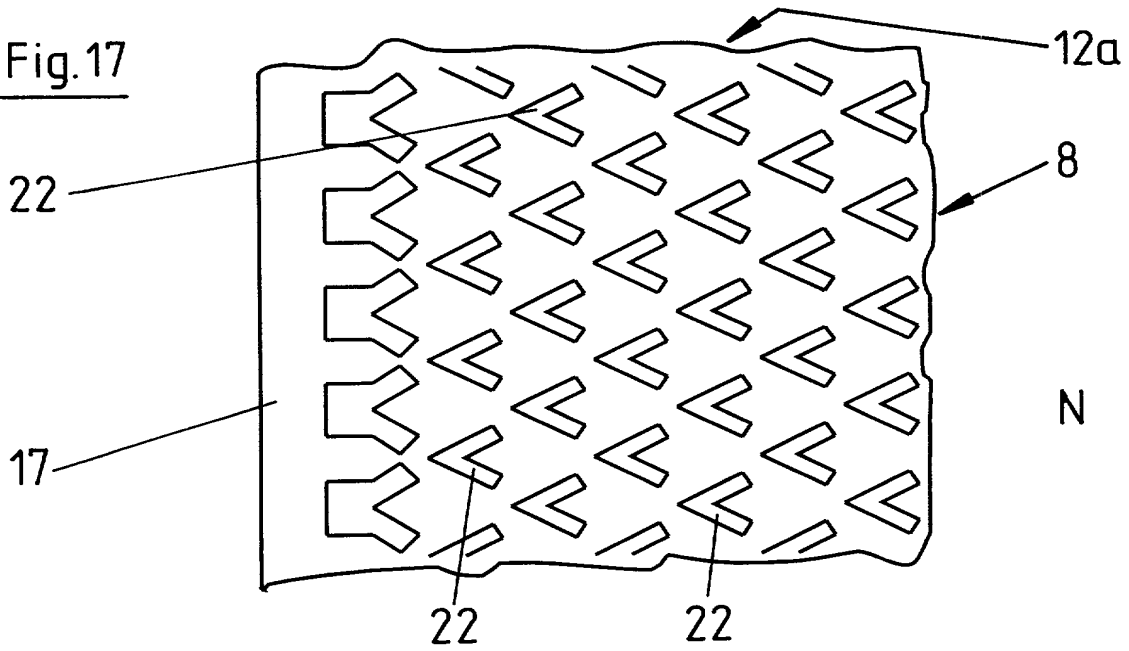


Fig.18

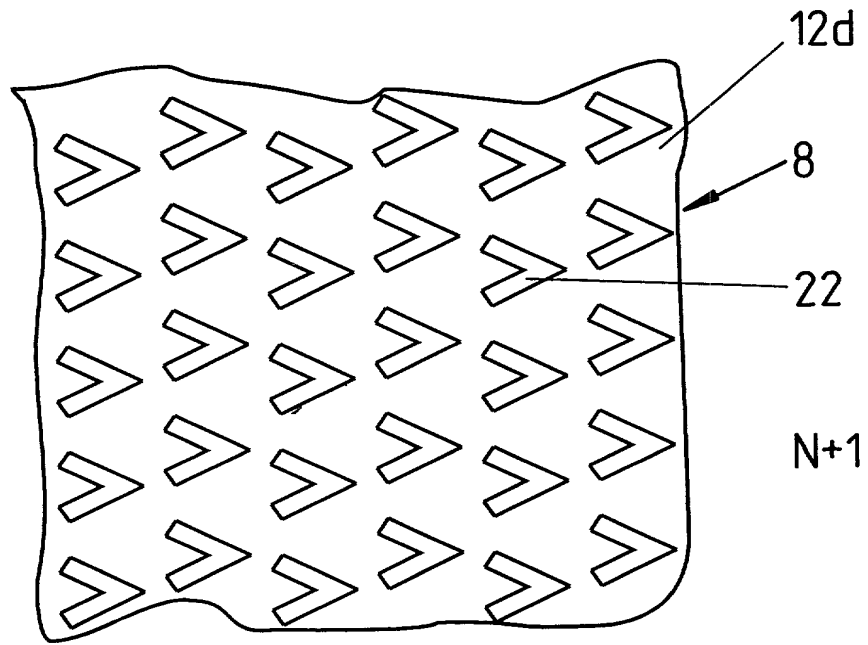


Fig.19

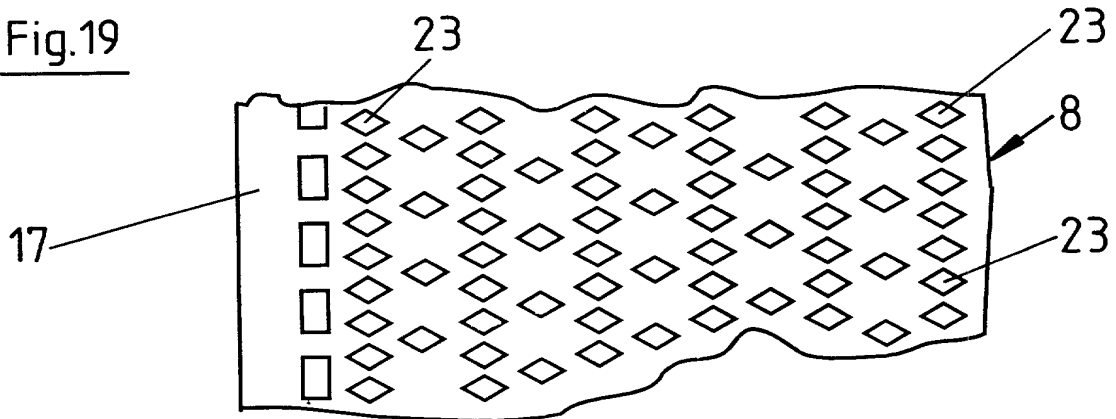


Fig. 20

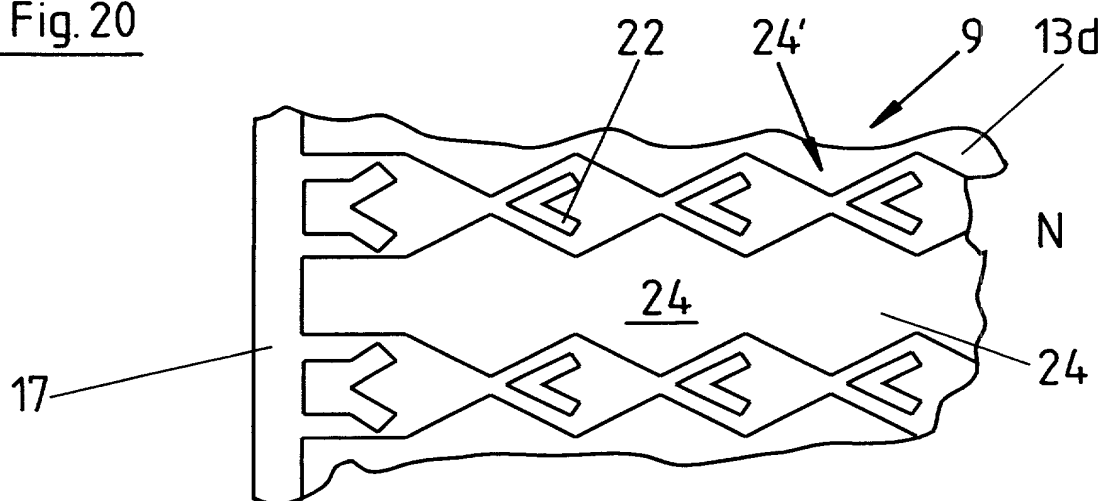


Fig. 21

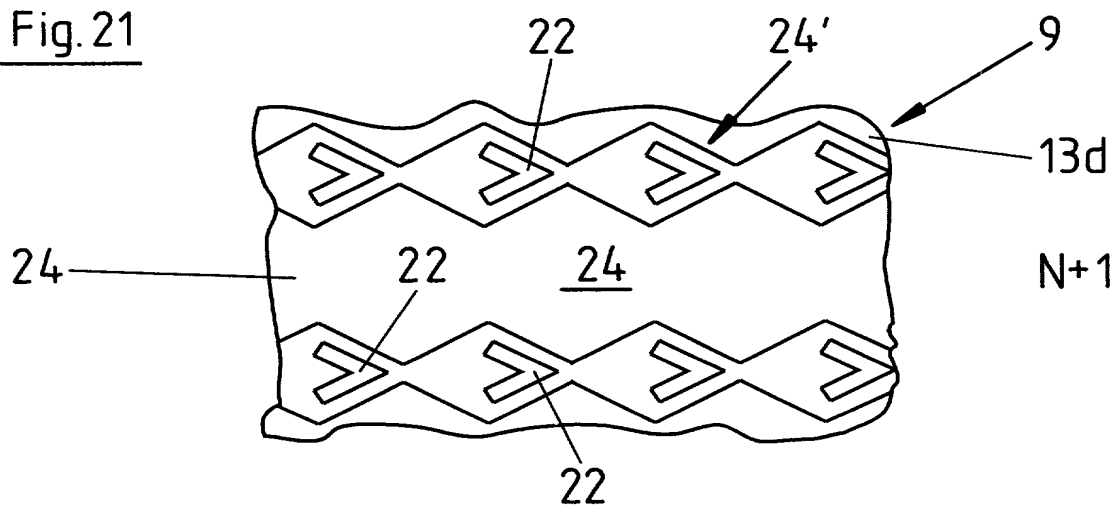


Fig. 22

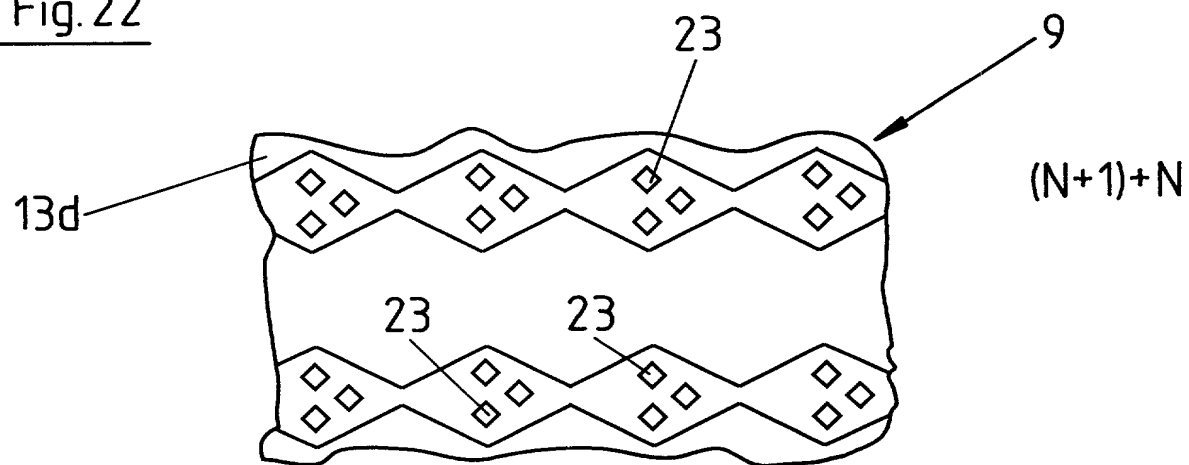


Fig. 23

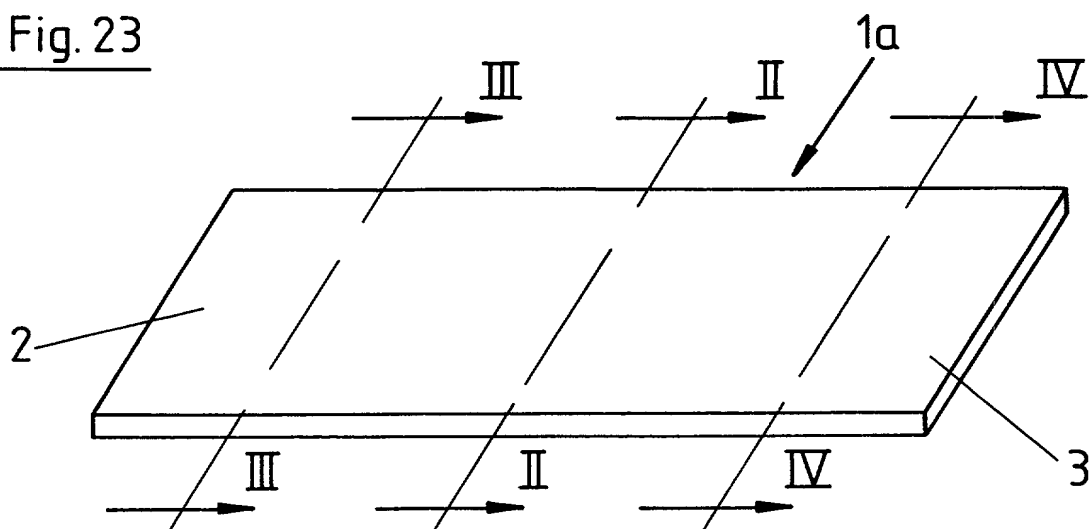


Fig. 24

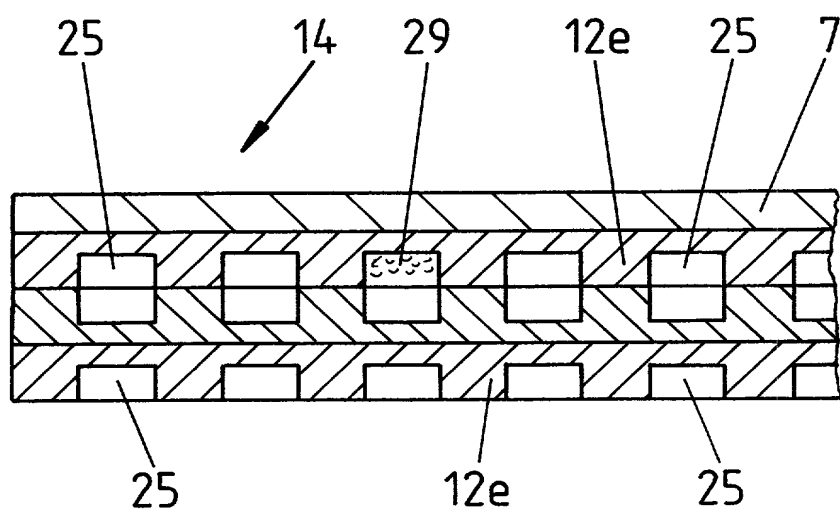


Fig. 25

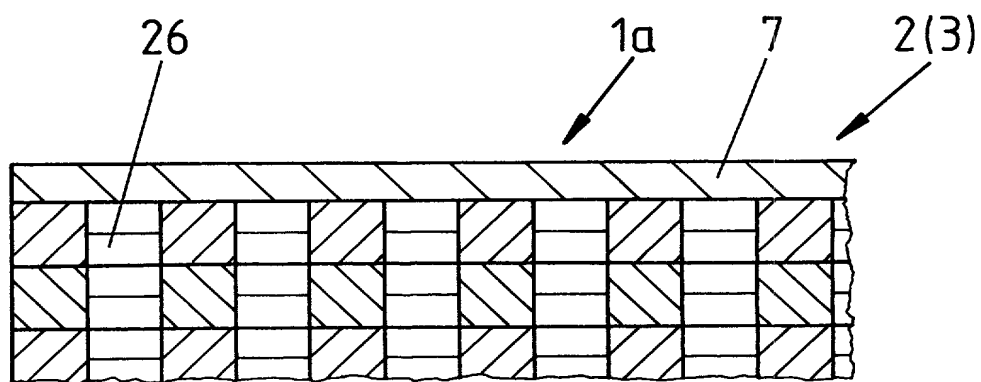


Fig. 26

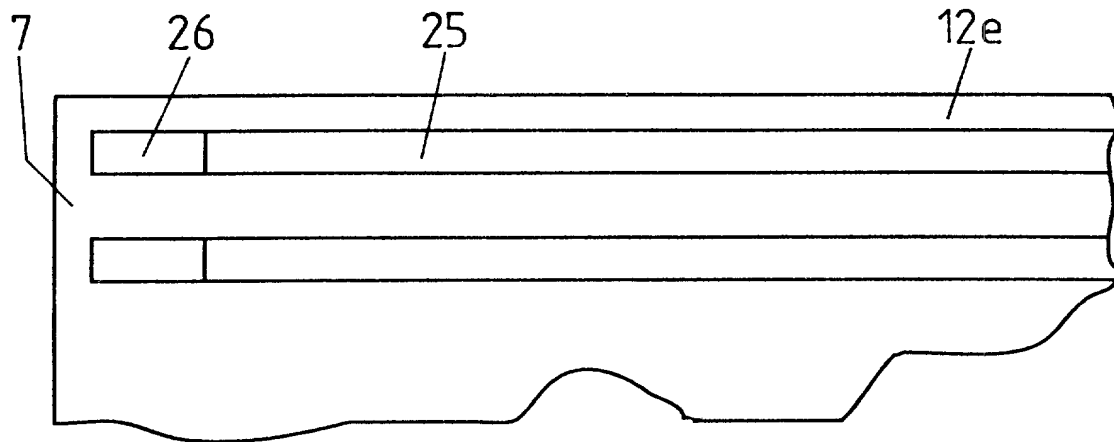


Fig. 28

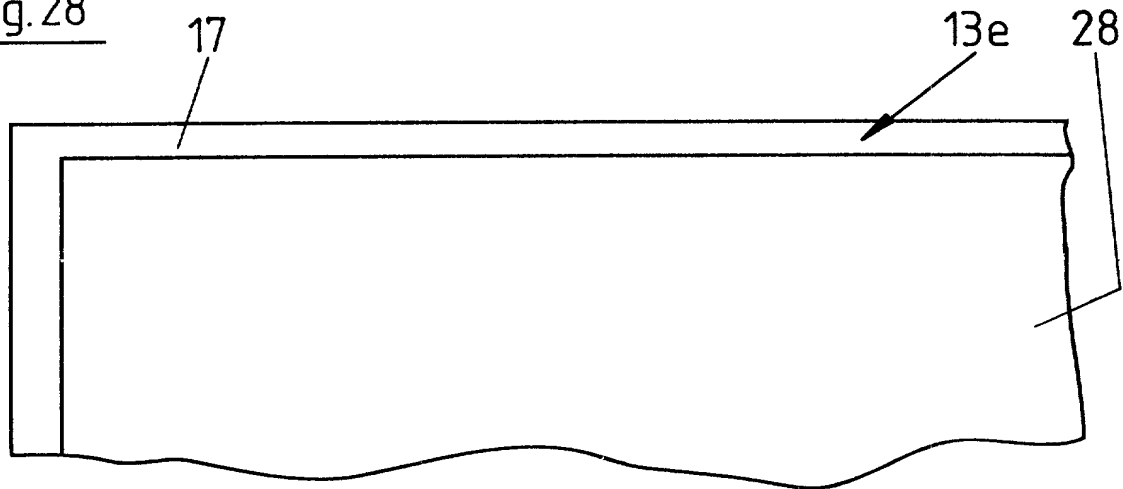


Fig. 27


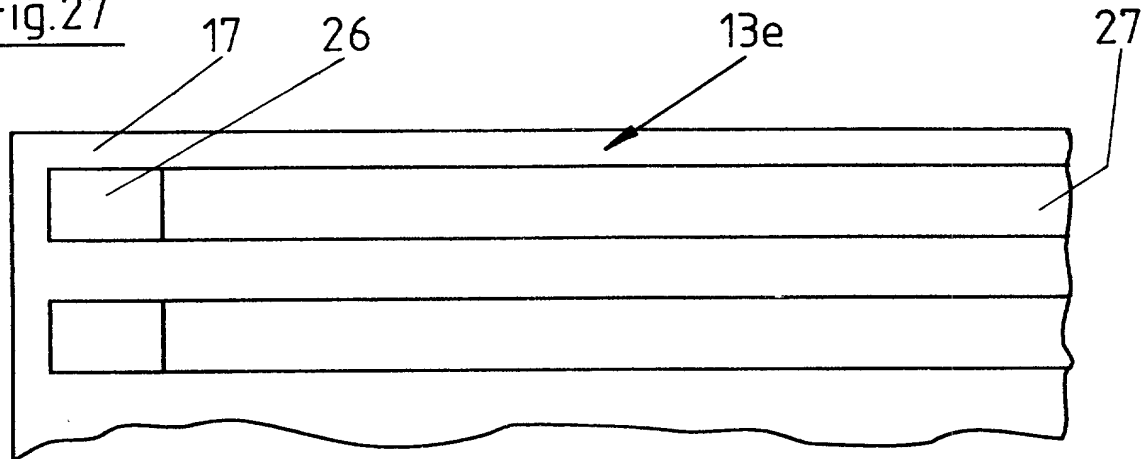


Fig. 29

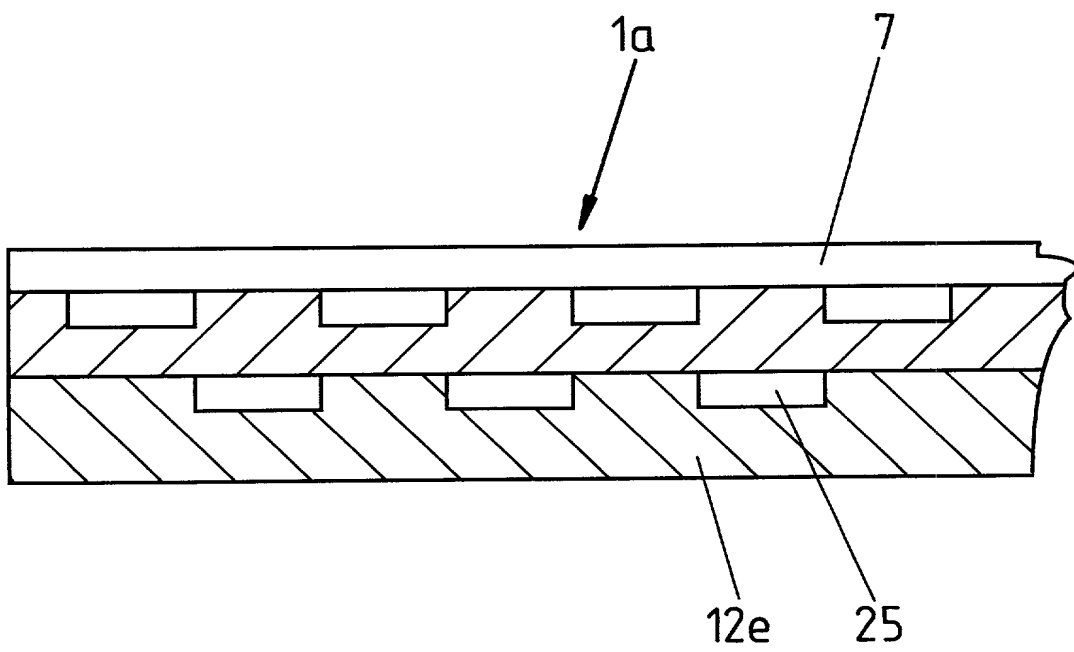

Declaration and Power of Attorney for Patent Application Erklärung für Patentanmeldungen mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

deren Beschreibung hier beigelegt ist, es sei denn (in diesem Falle Zutreffendes bitte ankreuzen), diese Erfindung

wurde angemeldet am _____
unter der US-Anmeldenummer oder unter der
Internationalen Anmeldenummer im Rahmen des
Vertrags über die Zusammenarbeit auf dem Gebiet
des Patentwesens (PCT)
_____ und am
_____ abgeändert (falls
zutreffend).

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

COOLER, IN PARTICULAR FOR ELECTRIC COMPONENTS

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____
as United States Application Number or PCT
International Application Number
_____ and was amended on
_____ (if applicable).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebenen Patentanmeldung, einschließlich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code of Federal Regulations, § 1.56 von Belang sind.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

German Language Declaration

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderurkunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderurkunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

Prior Foreign Applications
(Frühere ausländische Anmeldungen)

198 17 383.0 Germany
(Number) (Country)
(Nummer) (Land)

198 18 839.0 Germany
(Number) (Country)
(Nummer) (Land)

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

(Application No.) (Filing Date)
(Aktenzeichen) (Anmeldetag)

(Application No.) (Filing Date)
(Aktenzeichen) (Anmeldetag)

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

(Application No.) (Filing Date)
(Aktenzeichen) (Anmeldetag)

(Application No.) (Filing Date)
(Aktenzeichen) (Anmeldetag)

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachten Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
Priorität nicht beansprucht

20 April 1998
(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)



28 April 1998
(Day/Month/Year Filed)
(Tag/Monat/Jahr der Anmeldung)



I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status) (patented, pending, abandoned)
(Status) (patentiert, schwebend, aufgegeben)

(Status) (patented, pending, abandoned)
(Status) (patentiert, schwebend, aufgegeben)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

German Language Declaration

VERTRETUNGSVOLMACHT: Als benannter Erfinder beauftrage ich hiermit den (die) nachstehend aufgeführten Patentanwalt (Patentanwälte) und/oder Vertreter mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Angelegenheiten vor dem US-Patent- und Markenamt: *(Name(n) und Registrationsnummer(n) auflisten)*

Postanschrift:

Telefonische Auskünfte: *(Name und Telefonnummer)*

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: *(list name and registration number)*
Stewart L. Gitler, Reg. 31,256; Martin P. Hoffman, Reg. 22,261; Mitchell B. Wasson, Reg. 27,408; Douglas W. Robinson, Reg. 32,751; Christopher J. McDonald, Reg. 41,533

Send Correspondence to: Hoffman, Wasson & Gitler PC
2361 Jefferson Davis Highway - Suite 522
Arlington, VA 22202
Direct Telephone Calls to: *(name and telephone number)*
Stewart L. Gitler
(703) 415-0100

Vor- und Zuname des einzigen oder ersten Erfinders	Full name of sole or first inventor	Jürgen Schulz-Härdér
Unterschrift des Erfinders	Datum	Inventor's signature Date
Wohnsitz	Residence	Hugo-Dietz-Strasse 32 D-91207 Lauf GERMANY
Staatsangehörigkeit	Citizenship	Germany
Postanschrift	Post Office Address	Same as above
Vor- und Zuname des zweiten Miterfinders (falls zutreffend)	Full name of second joint inventor, if any	
Unterschrift des zweiten Erfinders	Datum	Second Inventor's signature Date
Wohnsitz	Residence	
Staatsangehörigkeit	Citizenship	
Postanschrift	Post Office Address	

(Im Falle dritter und weiterer Miterfinder sind die entsprechenden Informationen und Unterschriften hinzuzufügen.)

(Supply similar information and signature for third and subsequent joint inventors.)